



No: 1

产品装入真空管内
SG-A16 (600*12.5*18.4mm)




No: 2

塞塑胶塞




No: 3

10管为一扎
用PE膜固定每扎真空管两端及中间,
包住两端利角,以防划破胶袋




No: 4

将5扎包扎好的真空管装入真空袋,
外加2包干燥剂,机台抽真空
PE-20A规格: 35*95cm




产品摆放示意图

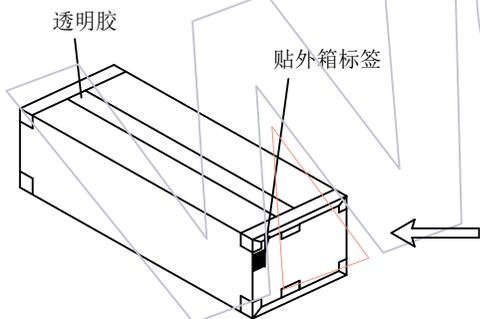


No: 5

封箱及贴标签于外箱侧面的左上角



No: 6

内箱放入外箱(2内箱/外箱)
外箱规格:CTN-10C(双坑 65*33*19CM)



No: 7

将抽真空的产品,放入内箱
(5扎/内箱)封箱
内箱规格:CTN-10A(63*15*17CM)

2.54mm DFCN 母座90度DIP, DIP=2.99				
PIN	产品长度	真空管装数量	每内箱装数量	每外箱装数量
8	28.84	20	1000	2000
16	39.00	14	700	1400
24	49.16	11	550	1100
32	59.32	9	450	900
40	69.48	8	400	800
48	79.64	7	350	700
56	89.80	6	300	600
64	99.96	5	250	500

说明:

- 产品如图所示形态放入真空管
- 注意各标签样式、位置及方向的一致性
- 当订单数量不足一内箱数量时,内箱可充当外箱使用,并贴标签

变更记事

零件图	颜色	SCALE	FIT
X.	COLOR		
X.X	材质	UNIT	mm
X.XX	MATERIAL		
X.XXX	设计	SIZE	A4
Angle	DESING	SHEET	1/1
X.	审核	PROJ.	
X.	CHECK		
DIM	核准		
TOL	APPROVE		

WCON

WCON ELECTRONICS (GUANGDONG) CO. LTD

料号 PART NO. 6340-1XXFRSXM2NT01

品名 TITLE: 2.54mm DFCN Conn. R/A Female正向型, XXP, 可配90度长方螺母 W/O Lock, DIP=2.99 管装规范

A0	2023/03/20
版次	日期
REV	DATE

NEW
变更说明
MODIFICATION DESCRIPTION

变更
CHANGE
核准
APPROVE