

HSF

NOTES:


Current Rating:1AMP
Contact Resistance:30mΩ max
Withstand Voltage:250V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze(C5191-H)
Contact plating:Au Or Sn Over Ni
Insulator Material:PA9T+30%GF(UL94V-0)

Ordering Information

WF1271- 1 WM H XX S0 B T 0

No. of Pins
4-50 PIN
Contact Plating
S0=Gold Flash/Tin
Packing:
T=Tube

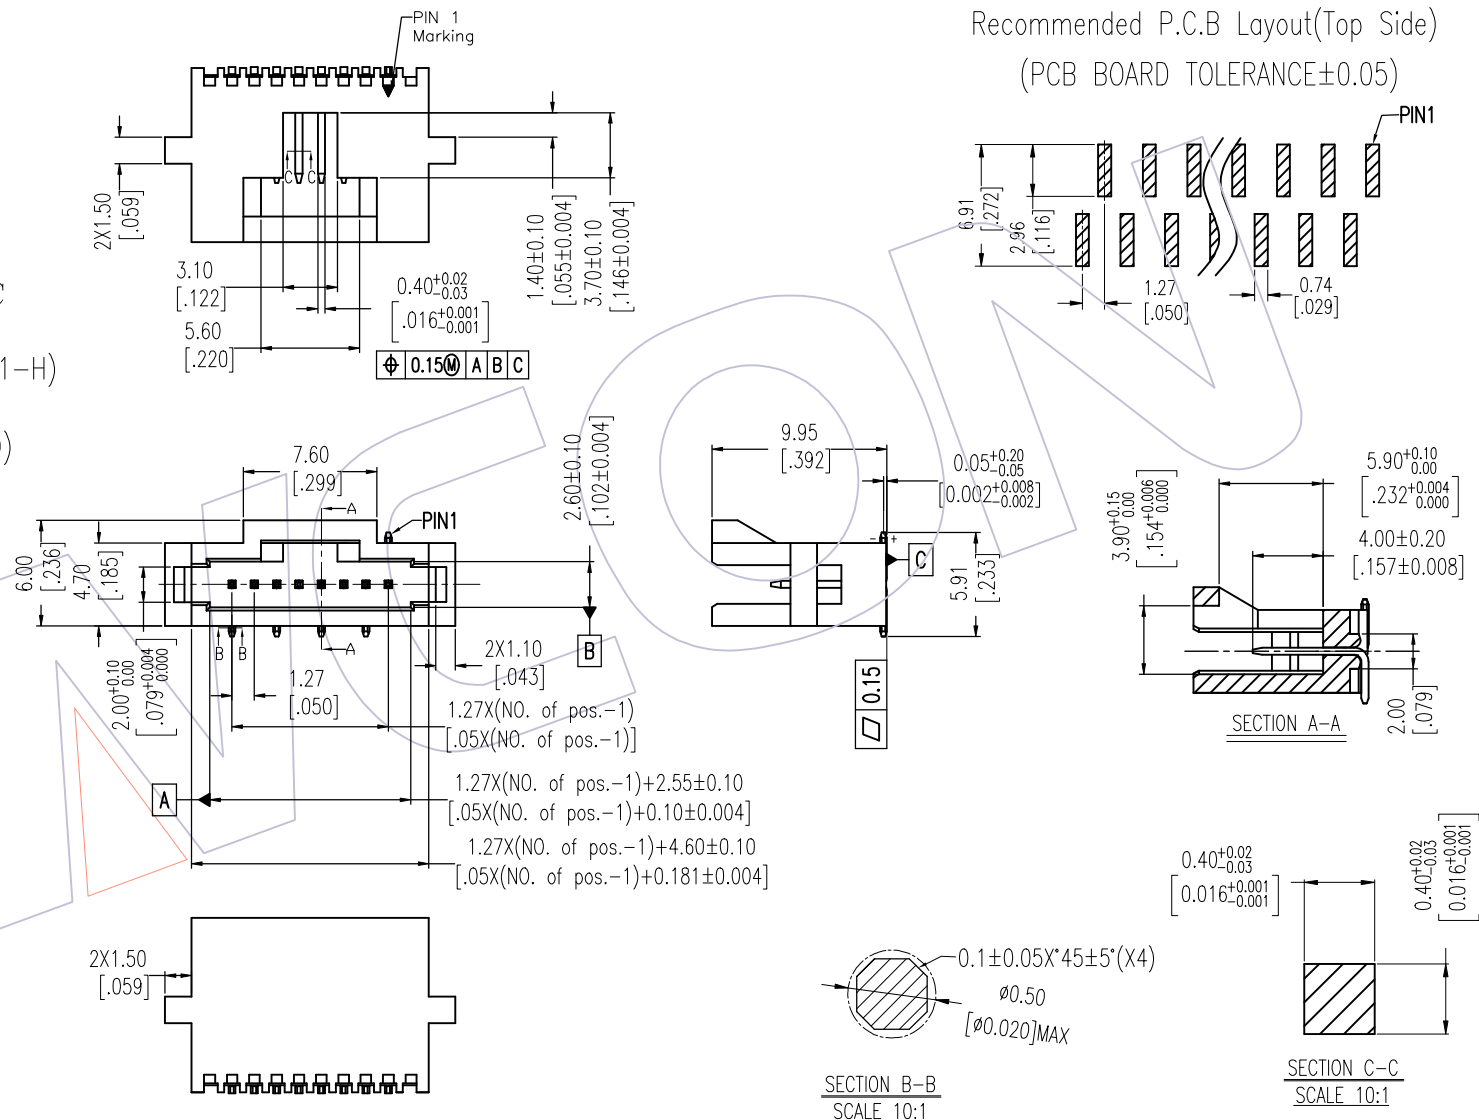

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON	WCON-Dongguan	WCON-Kunshan
				X.X	±0.40										
AO	2016/07/14	NEW		X.XX	±0.25	JYHuang	2016/07/14	UNIT	mm	WF1271-1WMHXXSOBTO	1.27 Wafer Conn			Tel: +86 769 85358920	Tel: +86 512 57468408
				X.XXX	±0.15	CHECK	DATE	SIZE	A4		180° SMT With Ear			Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle	± 3'	APPROVE	DATE	SHEET	1/1					E-mail: sales@wcon.com	E-mail: sales@wcon.com
				DIM	TOL			PROJ.							