

HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 800V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25℃ to +85℃

Contact Material: Brass
 Contact plating: Au Or Sn Over Ni
 Insulator Material: PA6T+30%G.F UL94V-0





Ordering Information

WF1503-W R XX E X 1

No. of pins
02~20P

Color
B=Black
E=Beige
W=White

Packing
T=Tube
R=Tray

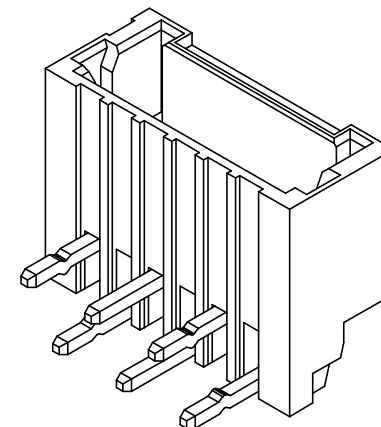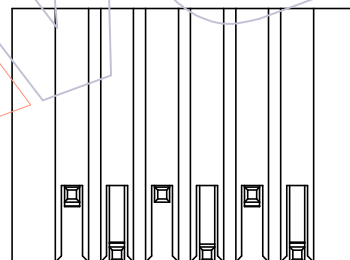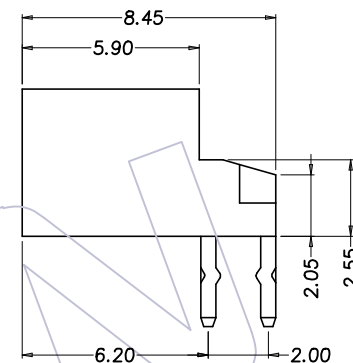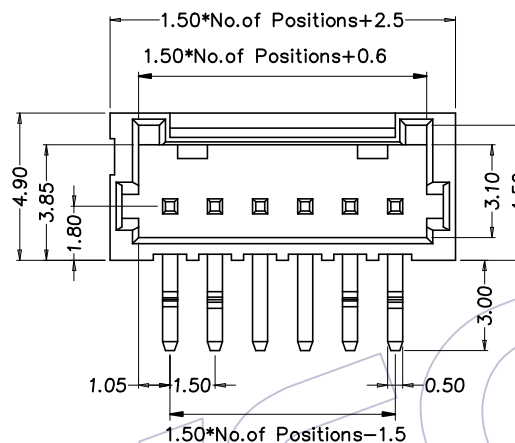

				OPERATION		DRAW CHEN.	DATE 2020/08/19	SCALE	FIT	PART NO. WF1503-WRXXEX1	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				X.X	±0.40			UNIT			
				X.XX	±0.25	CHECK	DATE	SIZE	A4	1.5 Wafer 90° DIP	
				X.XXX	±0.15			SHEET	1/1		
AO	2019/01/16	NEW		—	Angle	APPROVE	DATE	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM			TOL	PROJ.		