


HSF

NOTES:
 Rated Current:1A
 Rated Voltage:50V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:100MΩ min
 Operation Temperature:-25℃ to+85℃
 Material:Phosphor bronze


Ordering Information

WF1001 - TP XX 01


Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

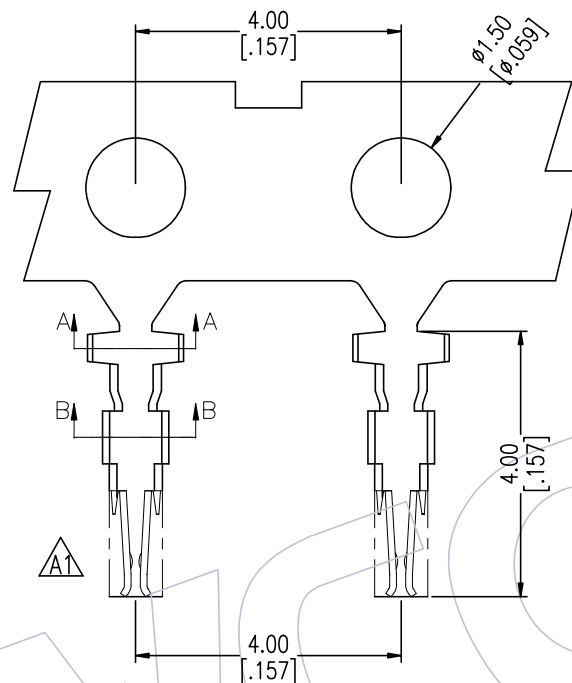


VIEW:C



VIEW:C

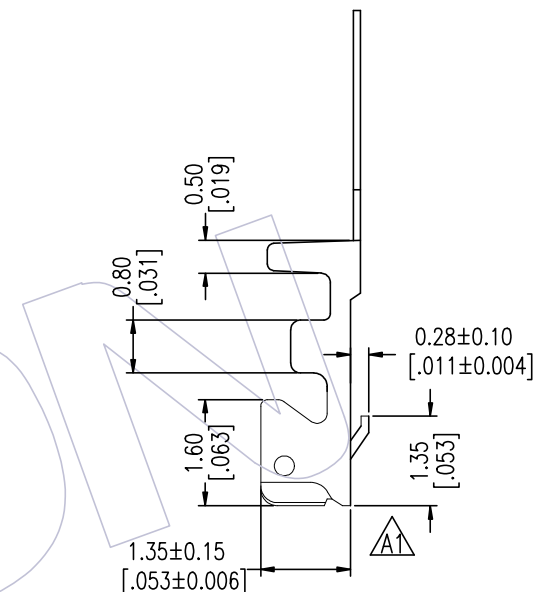

SECTION:A-A



SECTION:B-B

Dimensional & Ordering Information

Part No.	Thickness	Finish	Wire Range	Insulation O.D	Q'ty/Reel
WF1001-TPSN01	0.12	Tin-Plated	AWG#28~#32	0.8mm(Max.)	15,000PCS
WF1001-TPGX01	0.12	Gold-Plated	AWG#28~#32	0.8mm(Max.)	15,000PCS

				OPERATION		DRAW JYHuang	DATE 2021/03/01	SCALE	FIT	PART NO. SEE TAB	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
				X.X	±0.40			UNIT	mm inch			
A1	2021/03/01	Modyfy		X.XX	±0.25	CHECK	DATE	SIZE	A4			
AO	2012/09/01	NEW		X.XXX	±0.15			SHEET	1/1	Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	APPROVE	DATE	PROJ.				
				DIM	TOL							