

HSF

NOTES:

- 1.Voltage Rating: 250V AC ;
- 2.Withstand Voltage: 1500V AC;
- 3.Insulation Resistance: 1000MΩ Min;
- 4.Operating Temperature: -55°C to +105°C;
- 5.Insulator Material: PBT,G.F,UL94V-0,BK;
- 6.Mating Terminal: WD3810-MTD4XXXXXX

Ordering Information

WD3810 -2 HK XX B O 10
 Row:
 2=Dual








Tap Housing
 Free Hanging Type

No of Pins Per Row:
 03=3Pin,04=4Pin,
 05=5Pin,06=6Pin,
 08=8Pin,10=10Pin

Housing Color:
 B=Black

Foolproof Type:
 10=Symmetrical

Packing:
 0=PE Bag

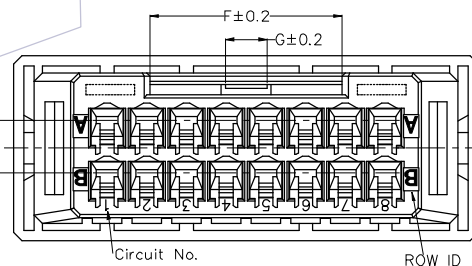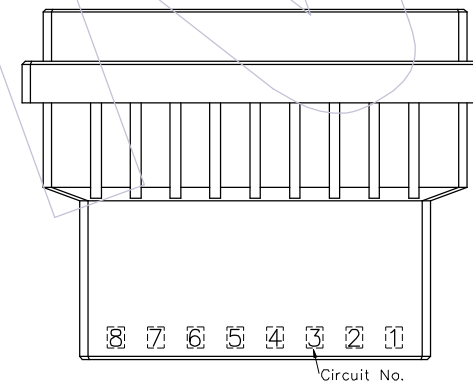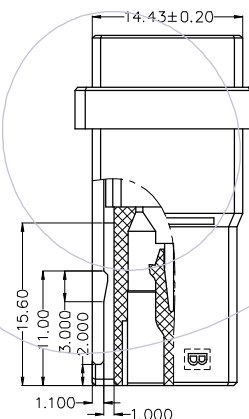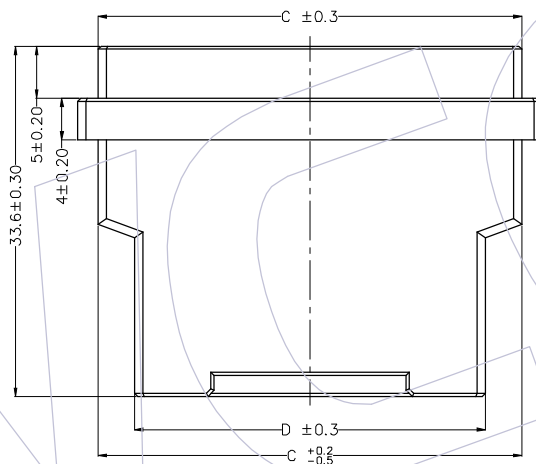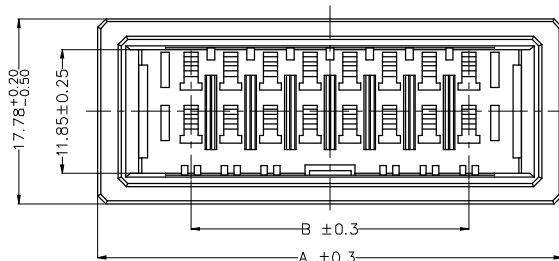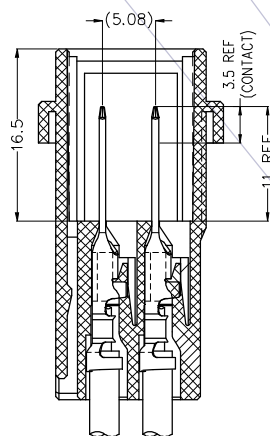

Part Number	Pos.	A	B	C	D	F	G
WD3810-2HK03B010	6	25.57	7.62	21.62	14.62	8.4	2.0
WD3810-2HK04B010	8	29.38	11.43	25.43	18.43	8.4	2.0
WD3810-2HK05B010	10	33.19	15.24	29.24	22.24	18.4	4.0
WD3810-2HK06B010	12	37.0	19.05	33.05	26.05	18.4	4.0
WD3810-2HK08B010	16	44.62	26.67	40.67	33.67	18.4	4.0
WD3810-2HK10B010	20	52.24	34.29	48.29	41.29	18.4	4.0

				OPERATION		DRAW Houfu Peng	DATE 2021.12.28	SCALE	FIT	PART NO. WD3810—2HKXXB010	WCON Http: www.wcon.com	
				X.X	±0.40			UNIT	mm			
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 3.81*5.08mm Tab Housing Dual Row (Free Hanging Type)		
A0	2021.12.28	NEW	Houfu Peng	X.XXX	±0.15			APPROVE	DATE		SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	PROJ.						
				DIM	TOL							