
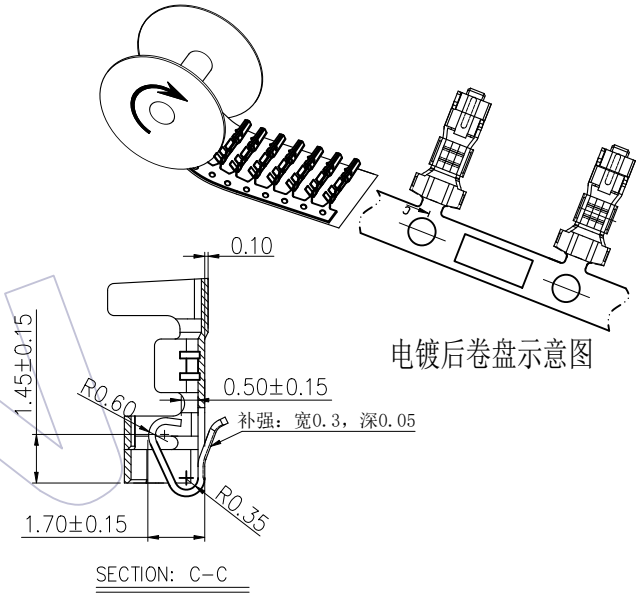
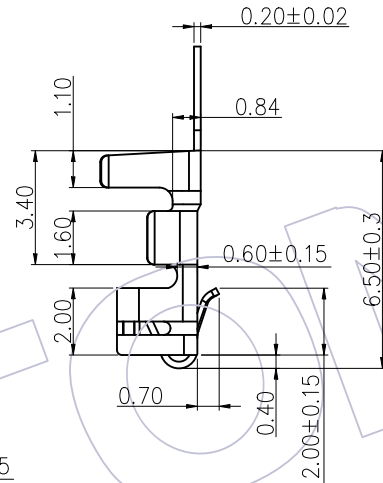


HSF

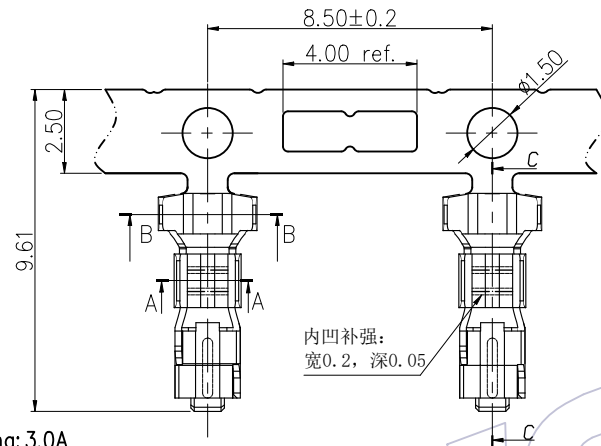

NOTES:
Current Rating: 3.0A
Voltage Rating: 250V AC
Contact Resistance: 20mΩ max
Withstand Voltage: 1000V AC/minute
Insulation Resistance: 1000MΩ min
Operation Temperature: -40℃ to +105℃

Material: Copper Alloy
Plating: Au or Sn Over Ni
Insulation OD range: Ø1.90mm Max.

Ordering Information

WF2501 - T P XX 0 X

Material
P=Phosphor bronze
Contact Plating:
G0=Gold Flash
S0=Gold Flash/Tin
SN=Tin

Dimensional & Ordering Information

PART NO.	Wire Range	A	B	C	D
WF2501-TPXX03	22-24#	1.50	2.00	3.10	2.96
WF2501-TPXX05	26-30#	1.30	1.60	3.10	2.96

				OPERATION		DRAW Tang	DATE 2024/04/08	SCALE	FIT	PART NO. See Table	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
				x.X	±0.40			UNIT	mm			
A1	2024/04/08	Add PART NO.		x.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: J-XH 2.50 TERMINAL		
A0	2021/08/12	NEW		x.XXX	±0.15			SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.		
				DIM	TOL							