
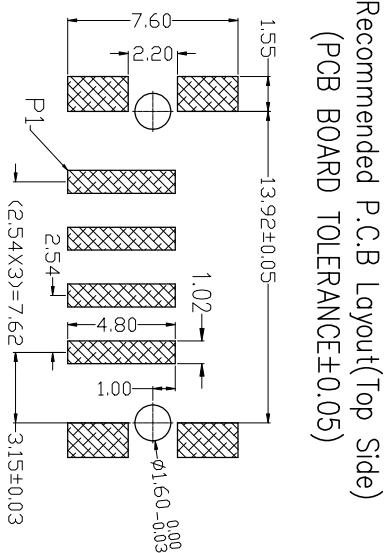


HSF

NOTES:

- 1.No.of Positions: 4 Pin
2.Rated Current:12.0 A Max;
3.Contact Resistance: 20mΩ Max;
4.Withstand Voltage: 2000V AC;
5.Insulation Resistance:1000MΩ Min ;
6.Operation Temperature: -55℃ to +150℃ ;
7.Housing Material: LCP
8.Contact Material: Copper Alloy ;
9.Contact Plating: Au over Ni ;




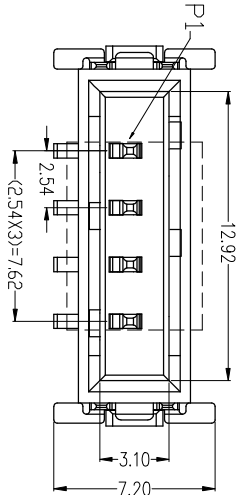


Ordering Information

3915-P 04-1 M XX W D X R 1

Contact Plated: _____
W3=10u" Gold /Matte Sn
W4=15u" Gold /Matte Sn
W5=30u" Gold /Matte Sn

Color: _____
B=BLACK
U=BLUE
G=GREEN
R=RED

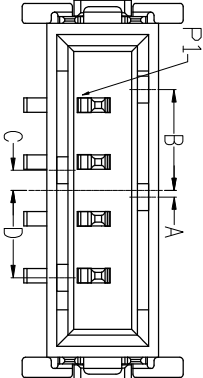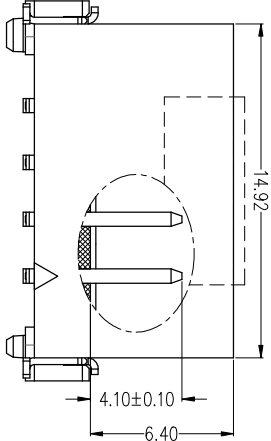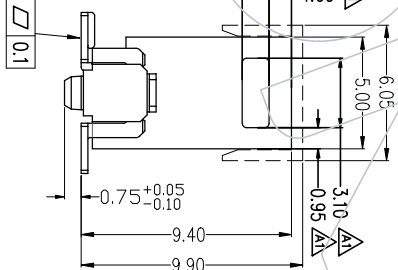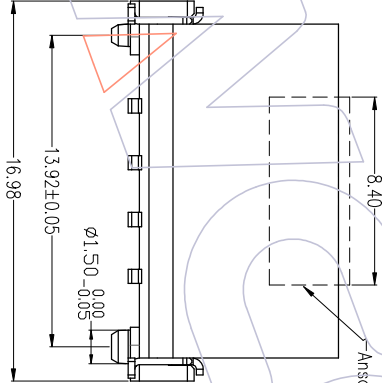

Stoy Basin

PART NO.	COLOR	防呆尺寸			
		A	B	C	D
3915-P04-1MXXWDBR1	BLACK	0.3	4.5	0.9	3.9
3915-P04-1MXXWDUR1	BLUE	1.5	3.3	2.1	2.7
3915-P04-1MXXWDGR1	GREEN	2.7	2.1	3.3	1.5
3915-P04-1MXXWDRR1	RED	3.9	0.9	4.5	0.3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2024/02/01	Modify Drawing	—	XXX	±0.25	CHECK	DATE	SIZE	A4	LSC Connector - Single Row	180° SMT Plug (4 PIN)	Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2019/07/05	NEW	—	XXX	±0.15	CHECK	DATE	SHEET	1/1	Customer NO.		Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	PART NO.	TITLE:	Customer NO.	E-mail: sdies@wcon.com	E-mail: sdies@wcon.com