
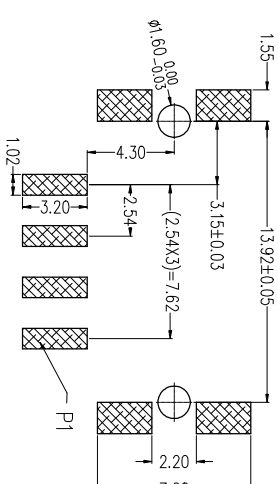
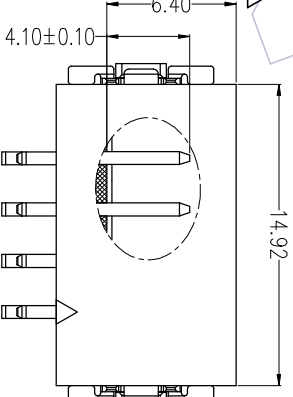
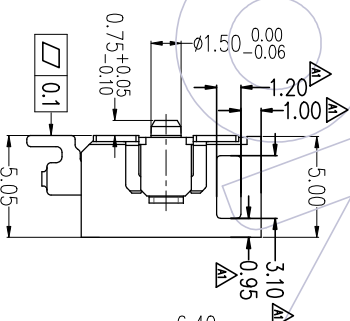
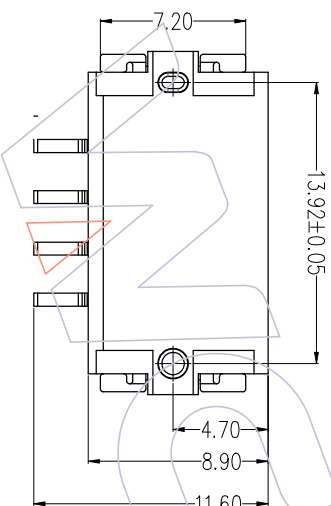


NOTES:

- 1.No.of Positions:4 Pin
- 2.Rated Current:12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
- 5.Insulation Resistance:1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;
- 7.Contact Material:Copper Alloy
- 8.Contact Plating:Au or Sn Over Ni
- 9.Insulator Material:High Temperature Thermoplastic(UL94V-0)

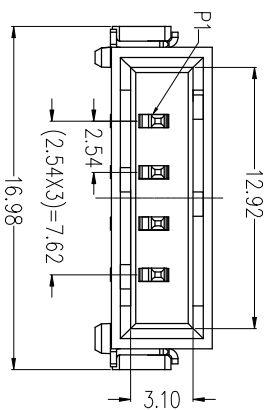


Ordering Information

3915-P 04-1 Z XX W D X R 1

Contact Plated: _____

Color: _____

B=BLACK
U=BLUE
G=GREEN
R=RED

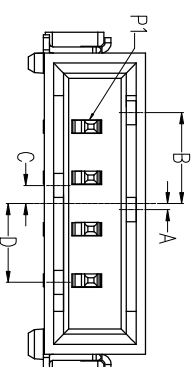

PART NO.	COLOR	防呆尺寸			
		A	B	C	D
3915-P04-1ZXXWDBR1	BLACK	0.3	4.5	0.9	3.9
3915-P04-1ZXXWDUR1	BLUE	1.5	3.3	2.1	2.7
3915-P04-1ZXXWDGR1	GREEN	2.7	2.1	3.3	1.5
3915-P04-1ZXXWDRR1	RED	3.9	0.9	4.5	0.3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		FIT	PART NO.	TITLE:	WCON			
				XX	±0.40			UNIT	mm							
A1	2024/02/01	Modify Drawing	—	XXX	±0.25	CHECK	DATE	SIZE	A4	1/1	3915-P04-1ZXXWDXR1	LSC Connector Single Row 90SMT Plug (4 Pin)	WCON			
A0	2019/12/11	NEW	—	XXX	±0.15	APPROVE	DATE	SHEET	1/1	1/1	Customer NO.	Customer NO.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	PROJ.					WCON			