
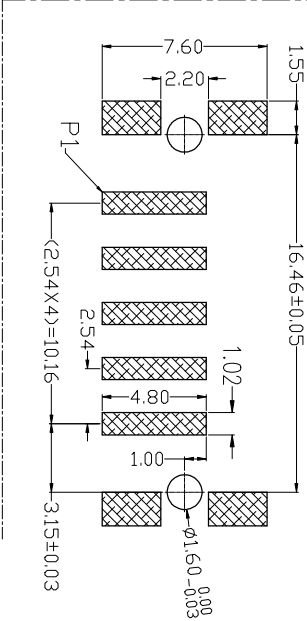


NOTES:

- 1.No.of Positions:5 Pin
- 2.Rated Current:12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
- 5.Insulation Resistance:1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;
- 7.Housing Material: LCP
- 8.Contact Material: Copper Alloy ;
- 9.Contact Plating: Au over Ni ;

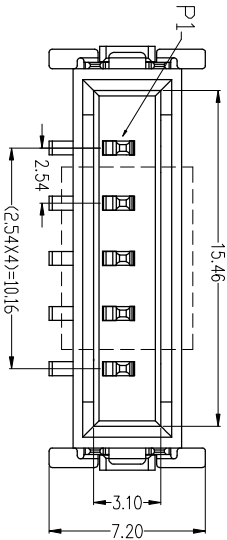




Ordering Information

3915-P 05-1 M XX W D X R 1

Contact Plated: _____

- W3=10u" Gold /Matte Sn
- W4=15u" Gold /Matte Sn
- W5=30u" Gold /Matte Sn

Color:
B=BLACK
U=BLUE
G=GREEN
R=RED

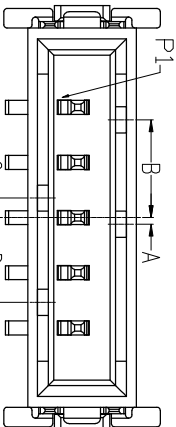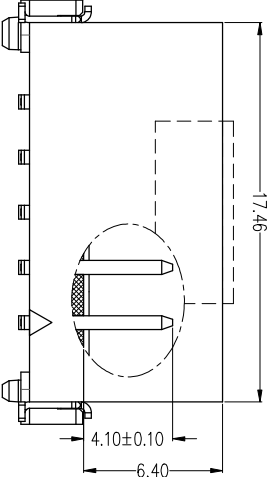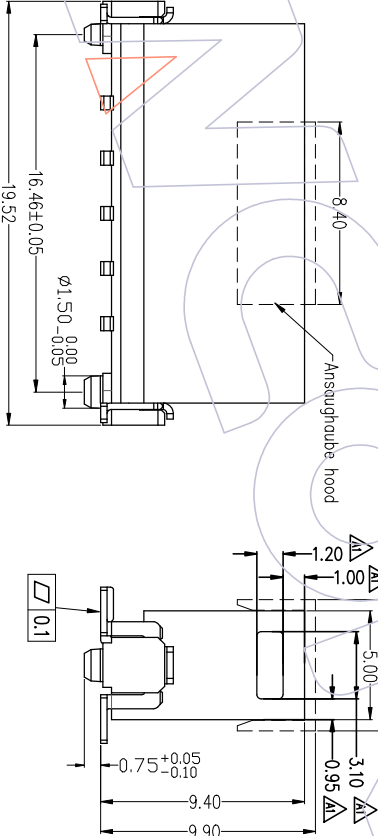

PART NO.	COLOR	防果尺寸			
		A	B	C	D
3915-P05-1MXXWDBR1	BLACK	0.3	4.5	0.9	3.9
3915-P05-1MXXWDUR1	BLUE	1.5	3.3	2.1	2.7
3915-P05-1MXXWDGR1	GREEN	2.7	2.1	3.3	1.5
3915-P05-1MXXWDRR1	RED	3.9	0.9	4.5	0.3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	DRAW CP	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2024/02/01	Modify Drawing	---	XXX	±0.25	CHECK	DATE	SIZE	A4	3915-P05-1MXXWDXR1	LSC Connector - Single Row 180° SMT Plug (5 PIN)		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2019/07/05	NEW	---	XXX	±0.15	APPROVE	DATE	SHEET	1/1				Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.					E-mail: sdles@wcon.com	E-mail: sdlesk@wcon.com