
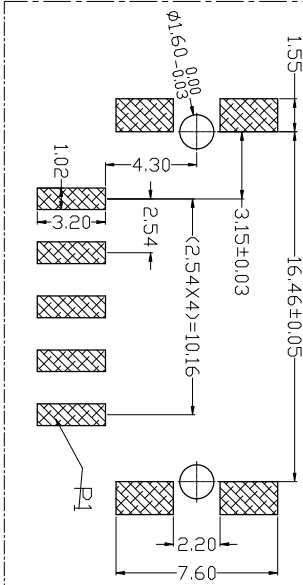


- NOTES:
- No. of Positions: 5 Pin
 - Rated Current: 12.0 A Max;
 - Contact Resistance: 20mΩ Max;
 - Withstand Voltage: 2000V AC;
 - Insulation Resistance: 1000MΩ Min ;
 - Operation Temperature: -55℃ to +150℃ ;
 - Housing Material: LCP
 - Contact Material: Copper Alloy ;
 - Contact Plating: Au over Ni ;

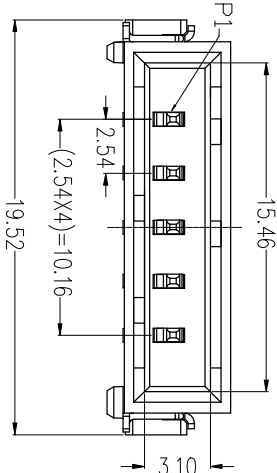

Ordering Information

3915-P 05-1 Z XX W D X R 1





Contact Plated: _____

Color:
B=BLACK
U=BLUE
G=GREEN
R=RED

W3=10u" Gold /Matte Sn

W4=15u" Gold /Matte Sn

W5=30u" Gold /Matte Sn

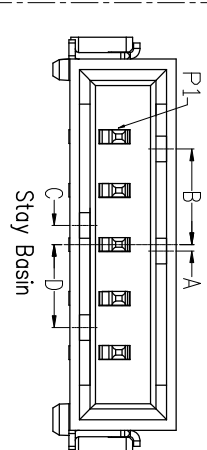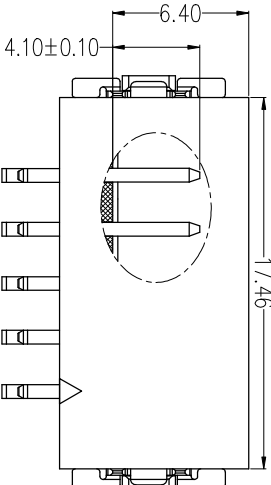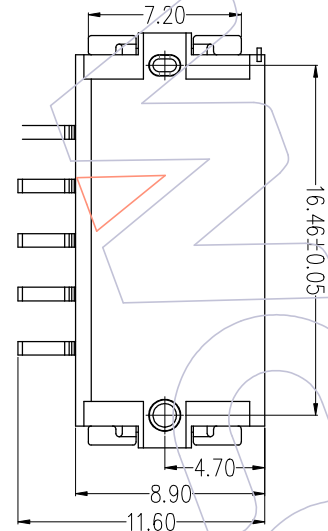

PART NO.	COLOR	防呆尺寸			
		A	B	C	D
3915-P05-12XXWDBR1	BLACK	0.3	4.5	0.9	3.9
3915-P05-12XXWDUR1	BLUE	1.5	3.3	2.1	2.7
3915-P05-12XXWDGR1	GREEN	2.7	2.1	3.3	1.5
3915-P05-12XXWDRR1	RED	3.9	0.9	4.5	0.3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	DRAW	CP	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2024/02/01	Modify Drawing	---	XXX	±0.25	CHECK	CHECK	2024/02/01	mm	inch	3915-P05-12XXWDXR1	LSC Connector - Single Row	90° SMT Plug (5 PIN)	Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2019/07/05	NEW	---	XXX	±0.15	APPROVE	APPROVE	DATE	SIZE	A4	90° SMT Plug (5 PIN)	Customer NO.		Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	PROJ.	1/1					E-mail: sales@wcon.com	E-mail: sales@wcon.com