
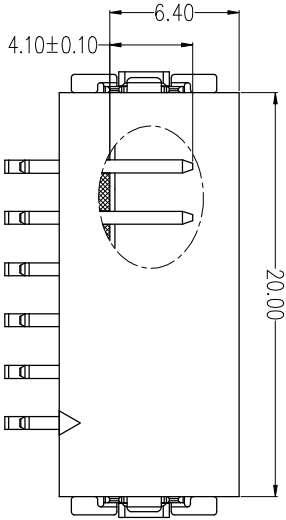
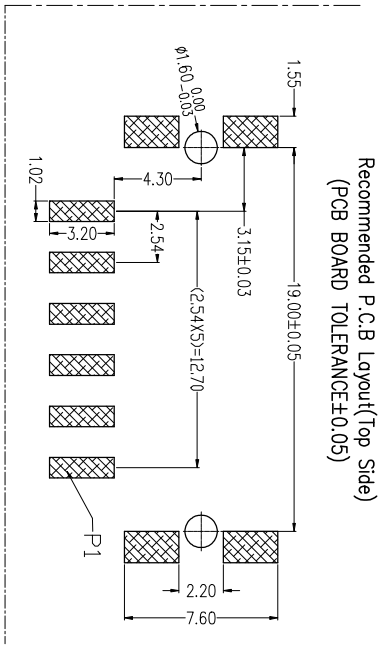
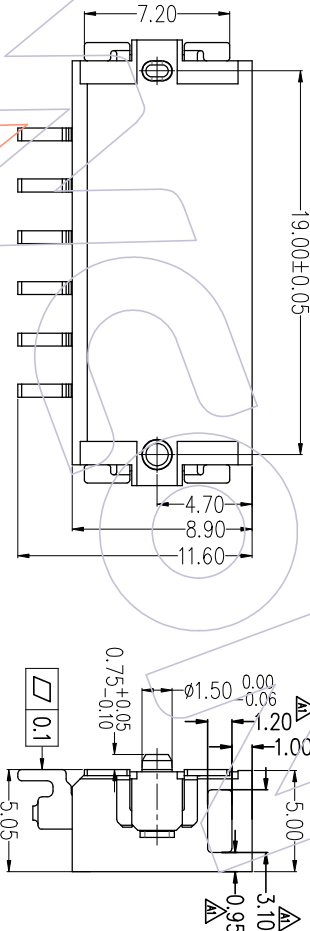


NOTES:

- 1.No.of Positions:6 Pin
2.Rated Current:12.0 A Max;
3.Contact Resistance: 20mΩ Max;
4.Withstand Voltage: 2000V AC;
5.Insulation Resistance:1000MΩ Min ;
6.Operation Temperature: -55℃ to +150℃ ;
7.Contact Material: Copper Alloy
8.Contact Plating: Au or Sn Over Ni
9.Insulator Material: High Temperature Thermoplastic(Ul94V-0)

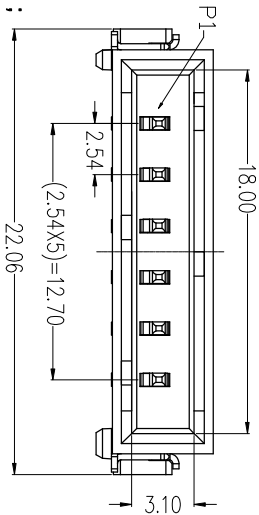

Ordering Information


3915-P 06-1 Z XX W D X R 1

Contact Plated: _____

W3=10u" Gold /Matte Sn
W4=15u" Gold /Matte Sn
W5=30u" Gold /Matte Sn

Color:

B=BLACK
U=BLUE
G=GREEN
R=RED

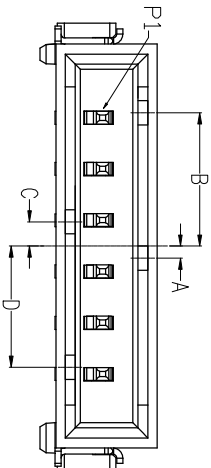

PART NO.	COLOR	防呆尺寸			
		A	B	C	D
3915-P06-1ZXXWDBR1	BLACK	0.6	6.6	1.2	6.0
3915-P06-1ZXXWDUR1	BLUE	1.8	5.4	2.4	4.8
3915-P06-1ZXXWDGR1	GREEN	3.0	4.2	3.6	3.6
3915-P06-1ZXXWDRR1	RED	4.2	3.0	4.8	2.4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
				XX	±0.40			CP	2024/02/01	UNIT	mm	mm	mm	mm	mm
A1	2024/02/01	Modify Drawing	—	XX	±0.25	CHECK	DATE	SIZE	A4	1/1	90SMT Plug (6 PIN)	LSC Connector – Single Row		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2019/12/11	NEW	—	XXX	±0.15	APPROVE	DATE	SHEET	1/1	1/1	Customer NO.			Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	PROJ.						E-mail: sdles@wcon.com	E-mail: sdles@wcon.com