
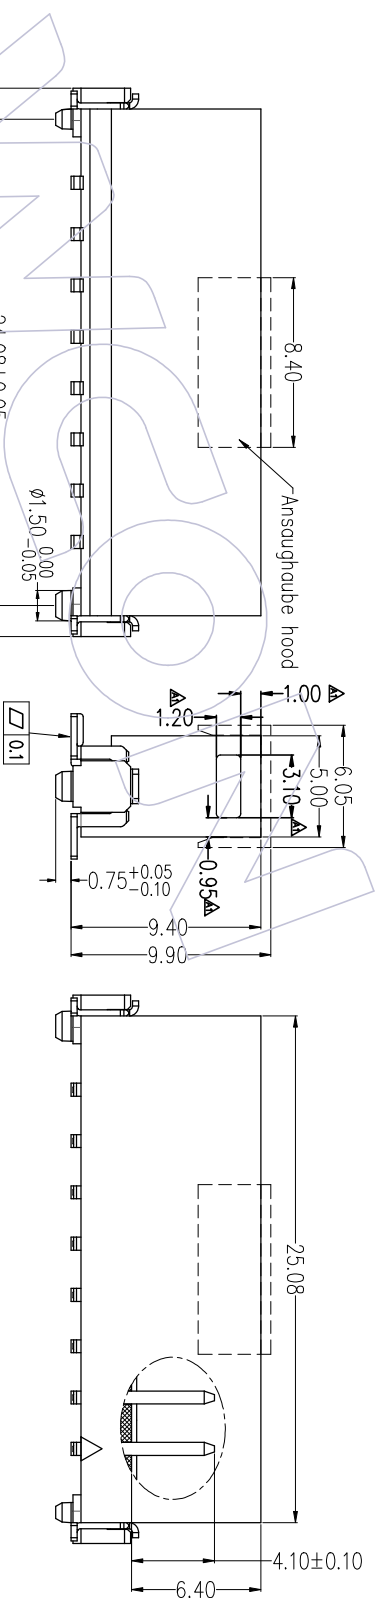
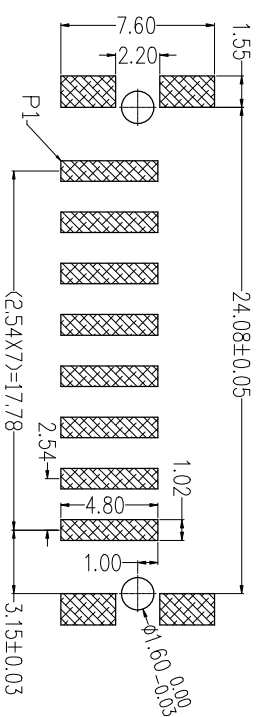


NOTES:


- 1.No.of Positions: 8 Pin
- 2.Rated Current:12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
- 5.Insulation Resistance:1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;
- 7.Contact Material: Copper Alloy
- 8.Contact Plating: Au or Sn Over Ni
- 9.Insulator Material: High Temperature Thermoplastic(UL94V-0)

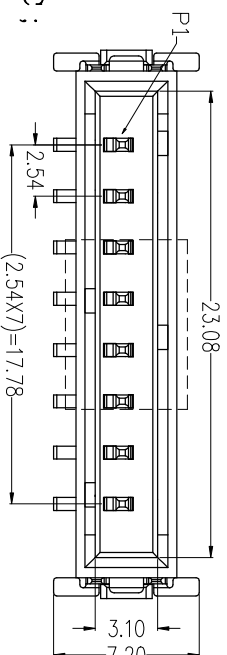

Ordering Information

3915-P 08-1 M XX W D X R 1

Contact Plated: _____
Color: _____
B=BLACK
U=BLUE
G=GREEN
R=RED
W3=10u" Gold /Matte Sn
W4=15u" Gold /Matte Sn
W5=30u" Gold /Matte Sn

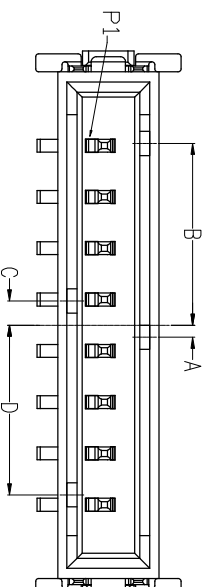

PART NO.	防呆尺寸			
	A	B	C	D
3915-P08-1MXXWDBR1	BLACK	0.6	9.0	1.2
3915-P08-1MXXWDUR1	BLUE	1.8	7.8	2.4
3915-P08-1MXXWDGR1	GREEN	3.0	6.6	3.6
3915-P08-1MXXWDRR1	RED	4.2	5.4	4.8

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		FIT	PART NO.	TITLE:	Customer NO.
				XX	±0.40			CP	2024/01/31	mm			
A1	2024/01/31	Modify Drawing	—	XX	±0.25	CHECK	DATE	SIZE	A4	inch	LSC Connector – Single Row	180SMT Plug (8 PIN)	
A0	2019/12/11	NEW	—	XXX	±0.15	APPROVE	DATE	SHEET	1/1	PROJ.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	PROJ.					

WCON

Http: www.wcon.com

WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sdles@wcon.com E-mail: sdles@wcon.com