
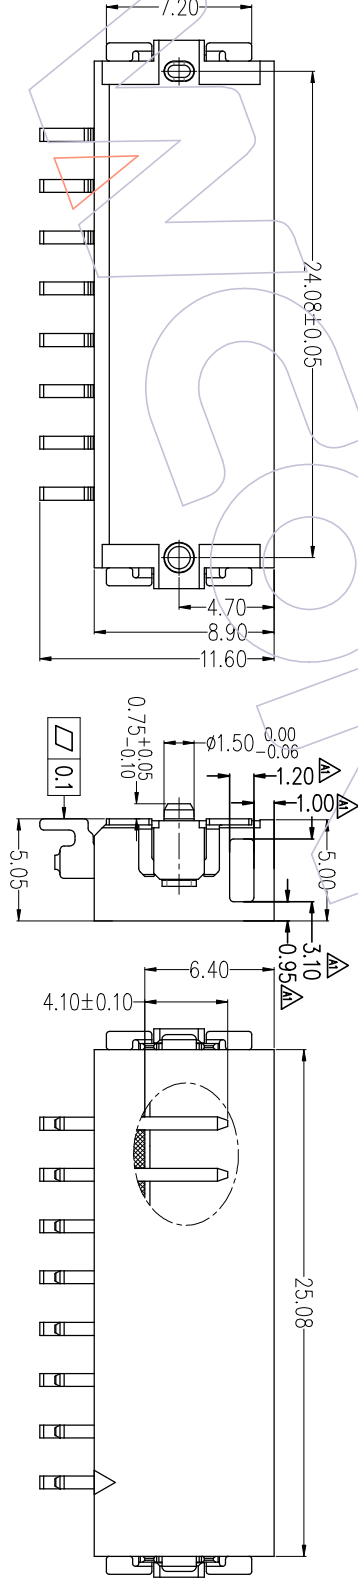
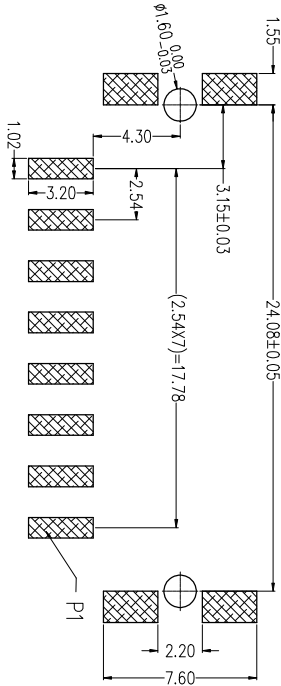


NOTES:


- 1.No.of Positions:8 Pin
- 2.Rated Current:12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
5. Insulation Resistance:1000MΩ Min;
- 6.Operation Temperature: -55℃ to +150℃;
- 7.Contact Material: Copper Alloy
- 8.Contact Plating: Au or Sn Over Ni
9. Insulator Material: High Temperature Thermoplastic(UL94V-0)

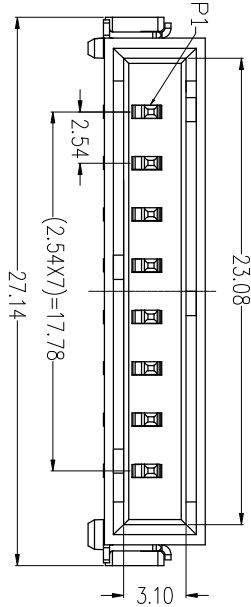

Ordering Information

3915-P 08-1 Z XX W D X R 1

Contact Plated: _____
Color: _____
B=BLACK
U=BLUE
G=GREEN
R=RED
W3=10u" Gold /Matte Sn
W4=15u" Gold /Matte Sn
W5=30u" Gold /Matte Sn

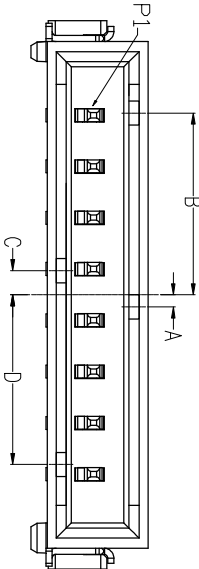

PART NO.	COLOR	防呆尺寸			
		A	B	C	D
3915-P08-1ZXXWDBR1	BLACK	0.6	9.0	1.2	8.4
3915-P08-1ZXXWDUR1	BLUE	1.8	7.8	2.4	7.2
3915-P08-1ZXXWDGR1	GREEN	3.0	6.6	3.6	6.0
3915-P08-1ZXXWDRR1	RED	4.2	5.4	4.8	4.8

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	SHEET	PROJ.	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2024/02/01	Modify Drawing	—	X.XX	±0.25	CHECK	DATE	SIZE	A4	90°SMT Plug (8 PIN)	LSC Connector – Single Row		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2019/12/11	NEW	—	X.XXX	±0.15	CHECK	DATE	SIZE	A4	90°SMT Plug (8 PIN)	LSC Connector – Single Row		Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	SHEET	PROJ.	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan