
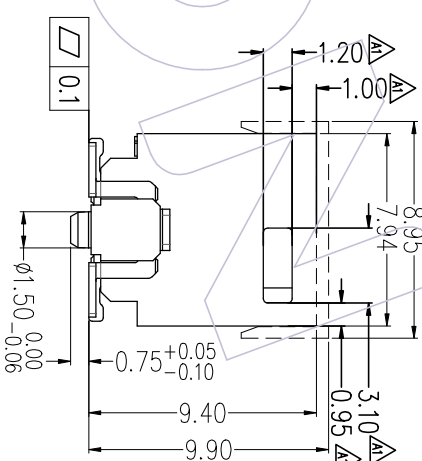
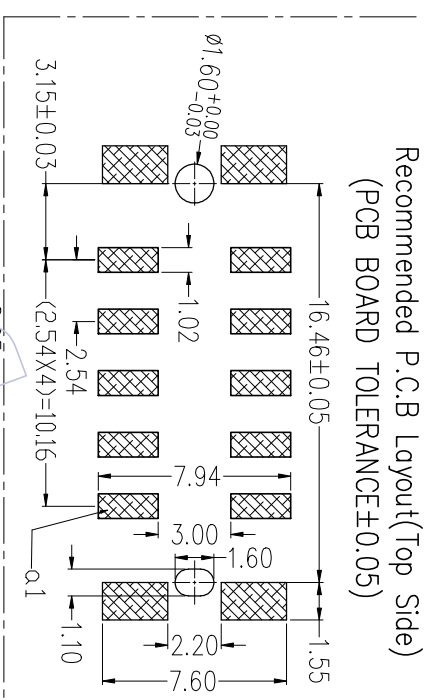
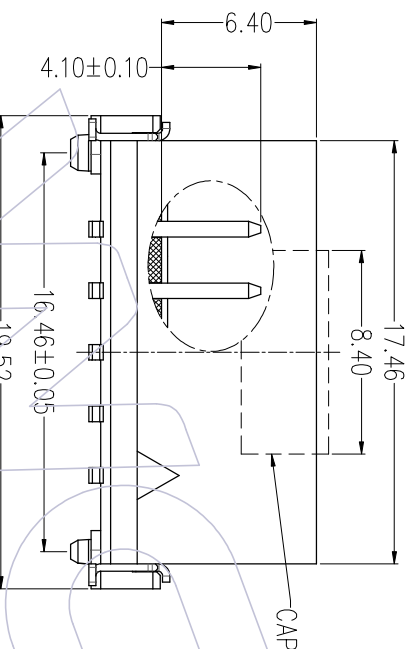
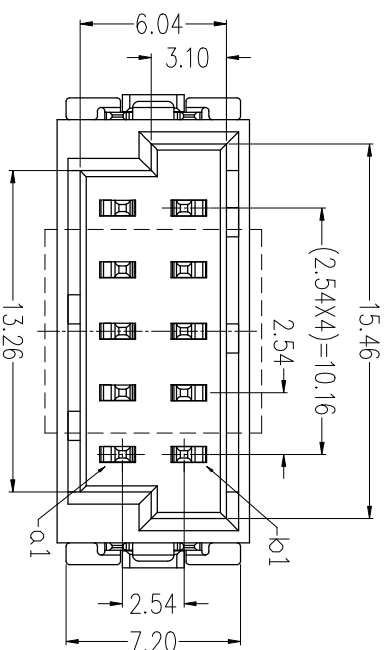


HSF

NOTES:

- 1.No. of Positions: 10 Pin
- 2.Rated Current: 12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
5. Insulation Resistance: 1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;
- 7.Housing Material: LCP
- 8.Contact Material: Copper Alloy ;
- 9.Contact Plating: Au over Ni ;



Ordering Information


3915-P 10-2 M XX W D X R I

Contact Plated:

W3=Sel. 10u" Au/Matte Sn
W4=Sel. 15u" Au/Matte Sn
W5=Sel. 30u" Au/Matte Sn

- Color:

B=BLACK
U=BLUE
G=GREEN
R=RED

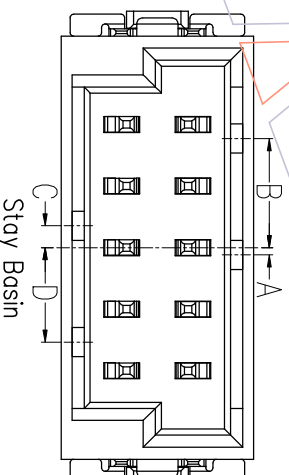

PART NO.	COLOR	防果尺寸			
		A	B	C	D
3915-P10-2MXXWDBR1	BLACK	0.3	4.5	0.9	3.9
3915-P10-2MXXWDR1	BLUE	1.5	3.3	2.1	2.7
3915-P10-2MXXWDGR1	GREEN	2.7	2.1	3.3	1.5
3915-P10-2MXXWDR1	RED	3.9	0.9	4.5	0.3

[illegible]