
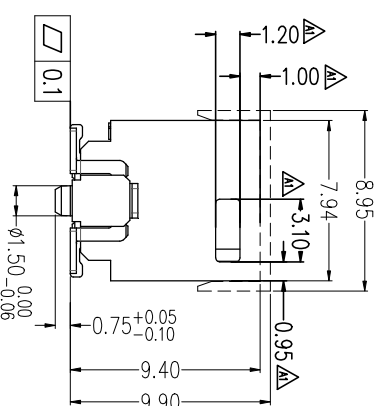


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)


- 1.No. of Positions: 20 Pin
- 2.Rated Current: 12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
- 5 insulation Resistance: 1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;
- 7.Housing Material: LCP
- 8.Contact Material: Copper Alloy ;
- 9.Contact Plating: Au over Ni ;

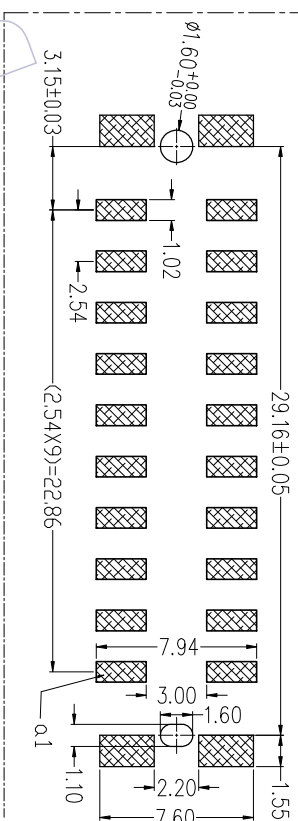

3915-P 20-2 M XX W D X R I

Contact Plated: _____
W3=Sel. 10u" Au/Matte Sn
W4=Sel. 15u" Au/Matte Sn
W5=Sel. 30u" Au/Matte Sn

B=BLACK
U=BLUE
G=GREEN
R=RED

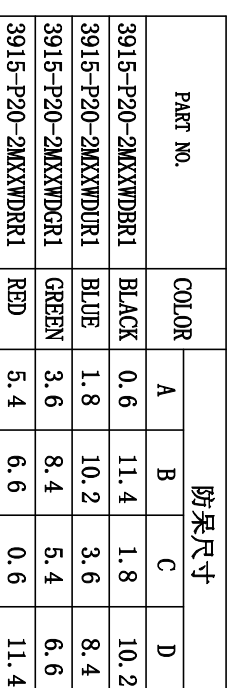

PART NO.	COLOR	枋果尺寸			
		A	B	C	D
3915-P20-2MXXWDBR1	BLACK	0.6	11.4	1.8	10.2
3915-P20-2MXXWDUR1	BLUE	1.8	10.2	3.6	8.4
3915-P20-2MXXWDGR1	GREEN	3.6	8.4	5.4	6.6
3915-P20-2MXXWDRR1	RED	5.4	6.6	0.6	11.4

[illegible]