

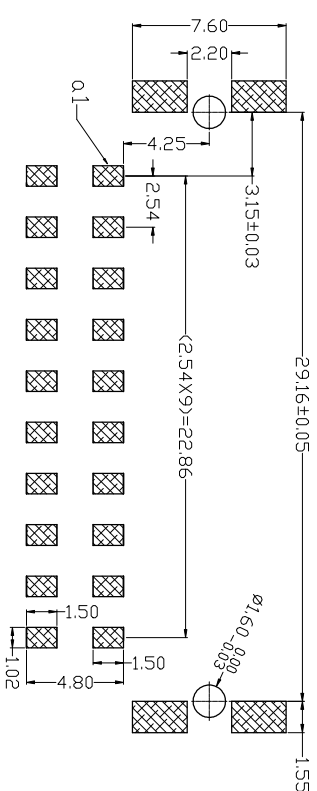


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

- 1.No. of Positions: 20 Pin
- 2.Rated Current: 12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
5. Insulation Resistance: 1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;

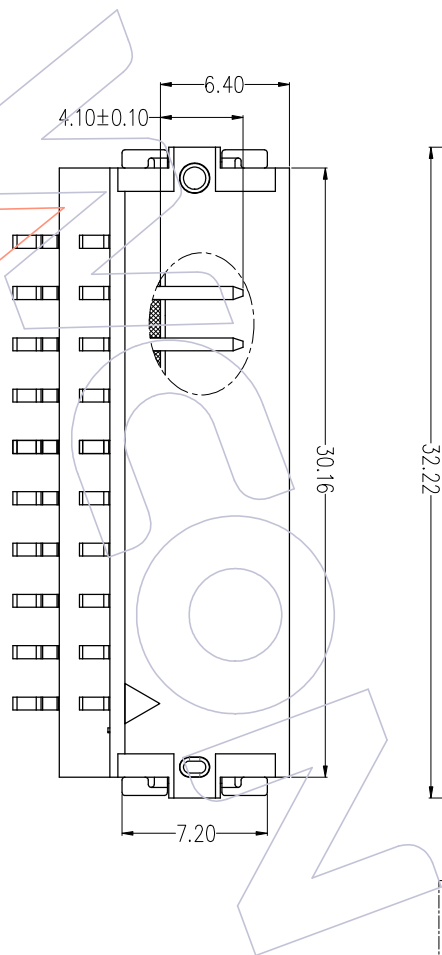


7. Contact Material: Copper Alloy
8. Contact Plating: Au or Sn Over Ni
9. Insulator Material: High Temperature Thermoplastic (UL94V-0)

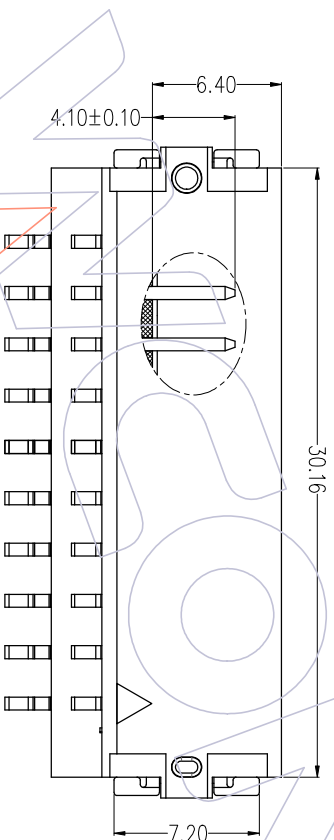

3915-P 20-2 Z XX W D X R I

W3=10u"	Gold /Matte Sn
W4=15u"	Gold /Matte Sn
W5=30u"	Gold /Matte Sn

B=BLACK
U=BLUE
G=GREEN
R=RED

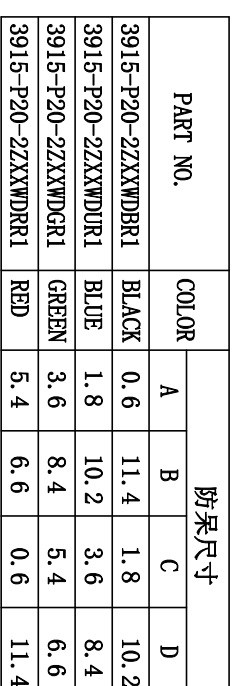

PART NO.	COLOR	防果尺寸			
		A	B	C	D
3915-P20-2ZXXWDRI	BLACK	0.6	11.4	1.8	10.2
3915-P20-2ZXXWDURI	BLUE	1.8	10.2	3.6	8.4
3915-P20-2ZXXWDGRI	GREEN	3.6	8.4	5.4	6.6
3915-P20-2ZXXWDRI	RED	5.4	6.6	0.6	11.4

[illegible]