

HSF

NOTES:

Rated Current:1.0AMP


Rated Voltage: 50V AC/DC

Contact Resistance: 20m Ω max

Withstand Voltage: 500V AC/Minute

Insulation Resistance: 500M Ω min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

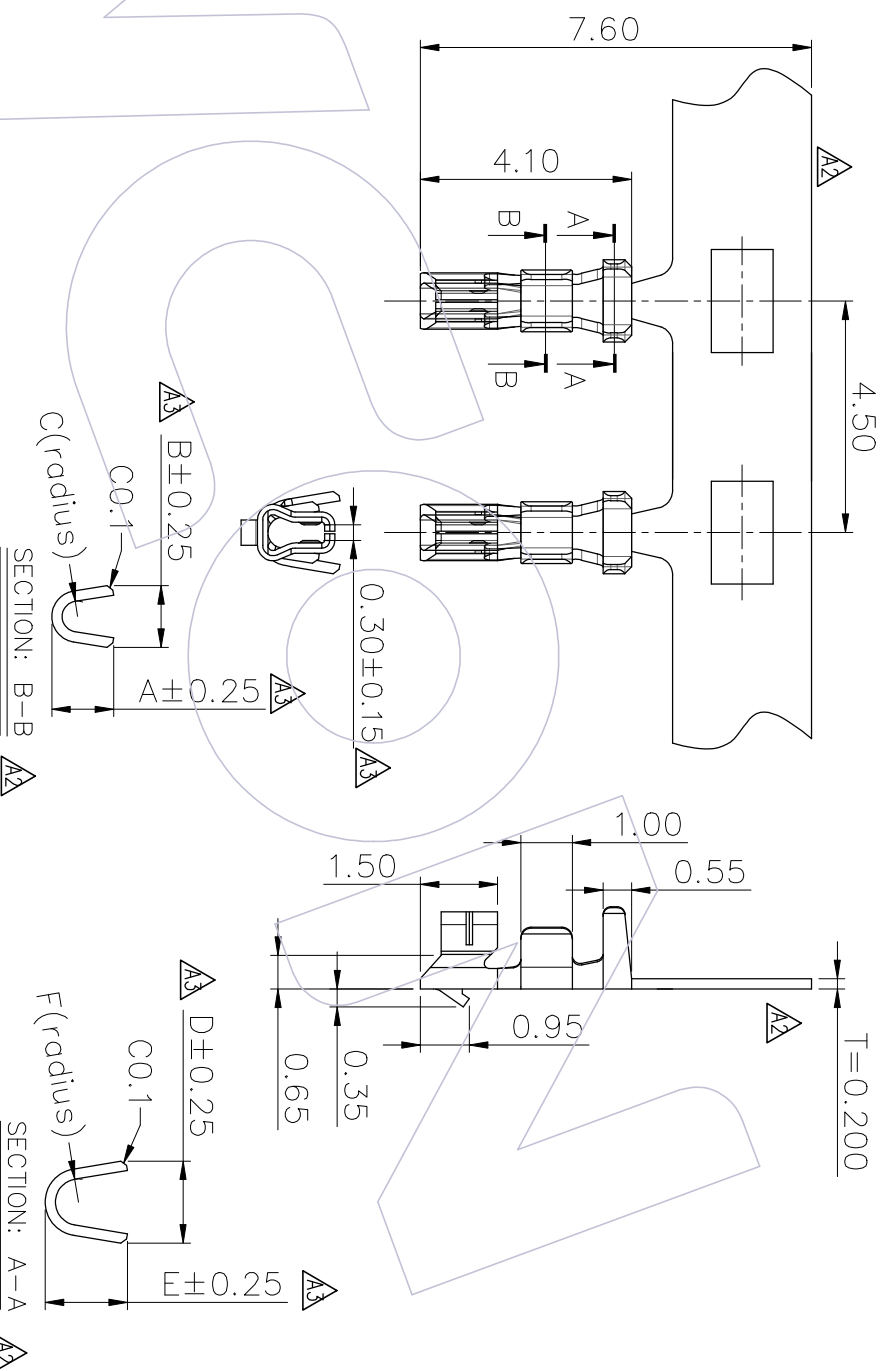

Ordering Information

WF 1501-TP XX 0 X

Contact Plating

G0=Gold Fish

 $\Gamma_3 = 10 \text{ m}^2 \text{ Gold}$

G4=150"Gold

U7=15u Gold
CS=30u"Gold

U3=50u Gold
S0=Gold Flash/Tin

50=Gold Flash/111

S3=10u"Gold/1in

S4=15u"Gold/Tin

S5=30u"Gold/Tin

SECTION: B-B			SECTION: A-A					
PART NO.	标识	适用线径 (AWG#)	DIMENSIONS					
			A	B	C (radius)	D	E (radius)	
WF1501-TPXX01	1	26-28	1.35	1.35	0.28	1.90	1.70	0.55
WF1501-TPXX02	2	30-32	1.20	1.20	0.28	1.60	1.60	0.40

A3	2020/10/30		Modify the drawing		DuYing	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.		
A2	2020/10/22		Modify the drawing		DuYing	X.X	±0.40	DuYing	2020/10/30	UNIT	mm	WF1501-TPXXOX		
A1	2014/01/16		Modify the drawing	JHuang	X.XX	±0.25	CHECK		DATE	SIZE	A4	ZH 1. 50 WAFER TERMINAL		
A0	2012/09/03		NEW		X.XXX	±0.15			DATE	SHEET	1/1			
REV	DATE		MODIFICATION DESCRIPTION	CHANGE		Angle ± 3°	APPROVE		DATE	PROJ.		Customer NO.		
 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sdcs@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sdcs@wcon.com														