

HSE

NOTES:

Rated Current:2A

Rated Voltage:250V AC/DC



Contact Resistance: 20mΩ max

Withstand Voltage:800V AC/Minute

Insulation Resistance: 1000M Ω min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Material: PA66 UL94V-0

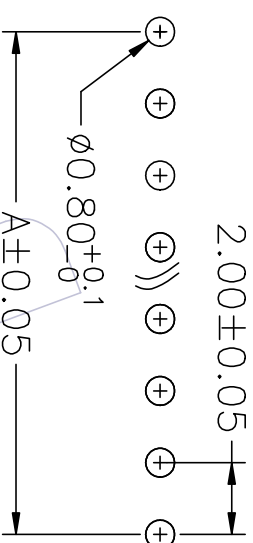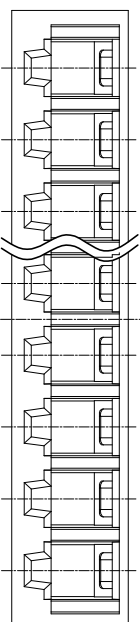

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

WF2004 - IH XX X 01

No.of pins
02P~15P

Color


E=Beige

W=White

B=Black
N=Brown

Packing

0=PE Bag

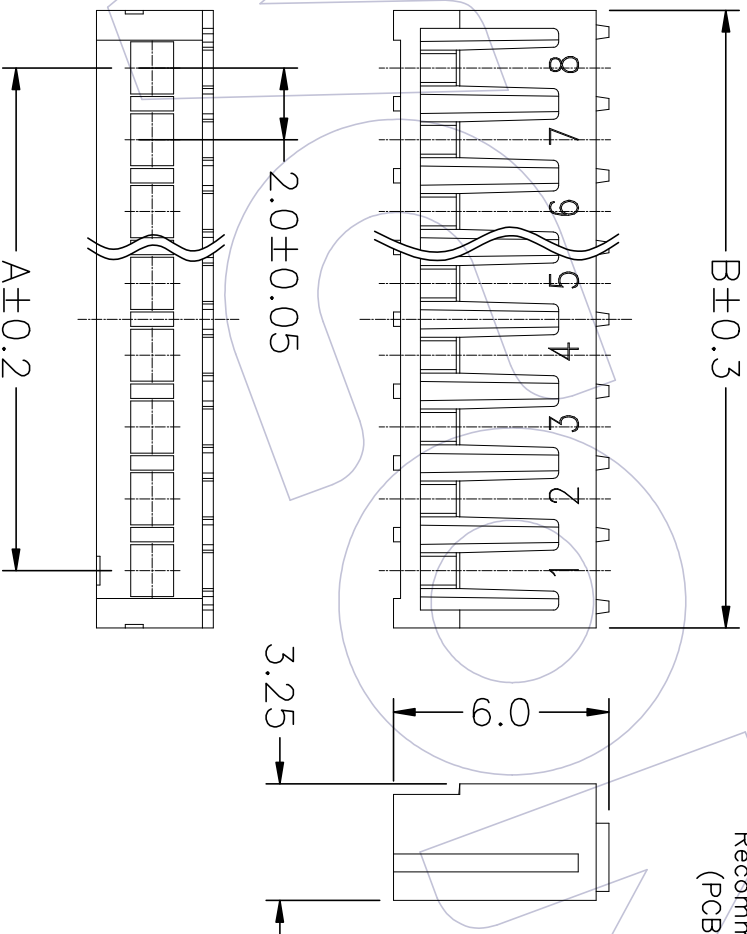

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2004—1H02X01	2.00	5.2
03	WF2004—1H03X01	4.00	7.2
04	WF2004—1H04X01	6.00	9.2
05	WF2004—1H05X01	8.00	11.2
06	WF2004—1H06X01	10.00	13.2
07	WF2004—1H07X01	12.00	15.2
08	WF2004—1H08X01	14.00	17.2
09	WF2004—1H09X01	16.00	19.2
10	WF2004—1H10X01	18.00	21.2
11	WF2004—1H11X01	20.00	23.2
12	WF2004—1H12X01	22.00	25.2
13	WF2004—1H13X01	24.00	27.2
14	WF2004—1H14X01	26.00	29.2
15	WF2004—1H15X01	28.00	31.2

 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com												PART NO. SEE TAB		SCALE UNIT		FIT mm		TITLE: 2.0mm Housing J Type Single Row		Customer NO.		
DRAW LYTTON		DATE 2023. 08. 23		CHECK		DATE		APPROVE		DATE												
OPERATION X.X		±0.40		CHECK		DATE		APPROVE		DATE												
X.XXX		±0.25		CHECK		DATE		APPROVE		DATE												
X.XXX		±0.15		CHECK		DATE		APPROVE		DATE												
Angle		± 3°		APPROVE		DATE		APPROVE		DATE												
DIM		TOL		APPROVE		DATE		APPROVE		DATE												
CHANGE		CHANGE		APPROVE		DATE		APPROVE		DATE												
MODIFICATION		DESCRIPTION		APPROVE		DATE		APPROVE		DATE												
DATE		DATE		APPROVE		DATE		APPROVE		DATE												
REV		REV		APPROVE		DATE		APPROVE		DATE												