HSF

NOTES:
Rated Current:2A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to+105℃
Material:PA66 UL94V−0

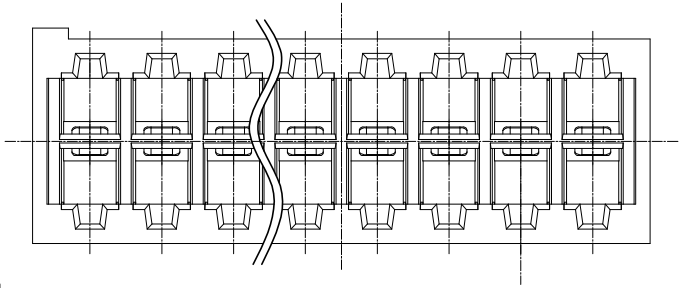

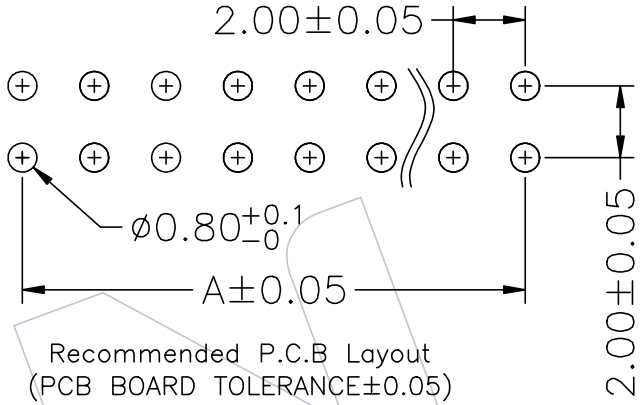

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)

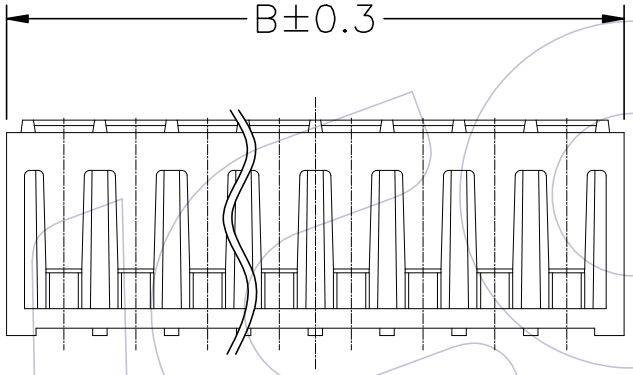

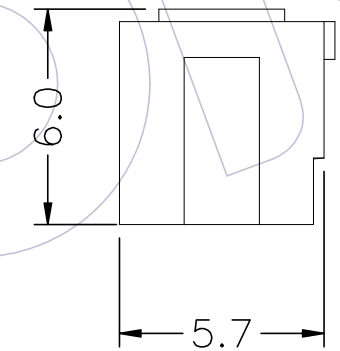

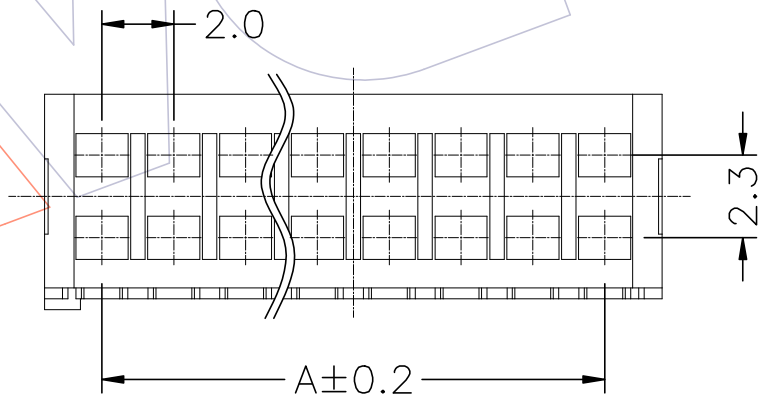

Ordering Information

WF2004 - 2H XX X 0 1

- No.of pins: 04P~30P
- Color: E=Beige, W=White, B=Black, N=Brown
- Packing: 0=PE Bag

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
04	WF2004−2H02X01	2.00	5.2
06	WF2004−2H03X01	4.00	7.2
08	WF2004−2H04X01	6.00	9.2
10	WF2004−2H05X01	8.00	11.2
12	WF2004−2H06X01	10.00	13.2
14	WF2004−2H07X01	12.00	15.2
16	WF2004−2H08X01	14.00	17.2
18	WF2004−2H09X01	16.00	19.2
20	WF2004−2H10X01	18.00	21.2
22	WF2004−2H11X01	20.00	23.2
24	WF2004−2H12X01	22.00	25.2
26	WF2004−2H13X01	24.00	27.2
28	WF2004−2H14X01	26.00	29.2
30	WF2004−2H15X01	28.00	31.2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
X0	2023. 08. 23	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Lytton	DATE	2023. 08. 23
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ	

PART NO. SEE TAB

TITLE: 2.0mm Housing J Type Dual Row

Customer NO.

WCON
Http: www.wcon.com
WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E−mail: sales@wcon.com
WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E−mail: salesks@wcon.com