

HSE

NOTES:

Rated Current:2.0A

Rated Voltage:250V AC/DC

Contact Resistance: 20m $\Omega$  max

Withstand Voltage:800V AC/Minute

Insulation Resistance: 1000M $\Omega$  min

Operation Temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Contact Material: Copper Alloy

Contact plating:100u”Tin over 30u”nickel



## Ordering Information

WF2004-TB XX 02

Plating:  
SN=Tin

~~Specification Information:~~

|            |                 |
|------------|-----------------|
| Wire Range | Insulation O.D. |
| AWG#28~#24 | ø0.90~1.50mm    |

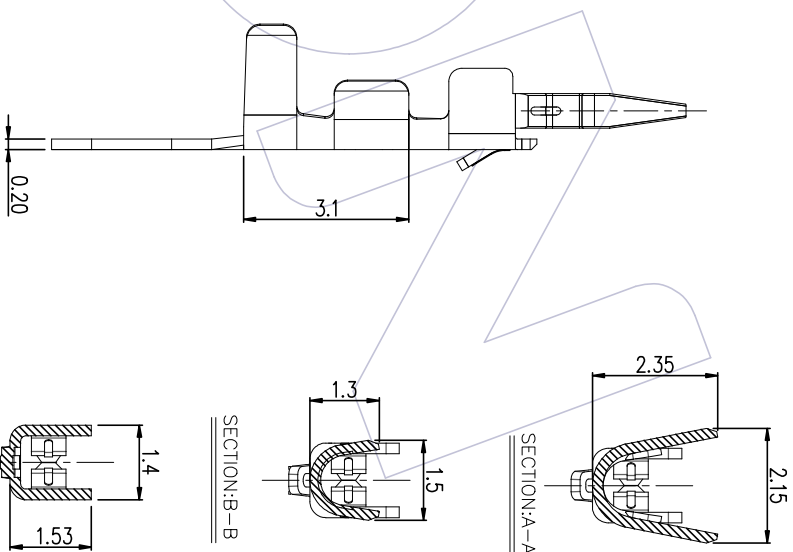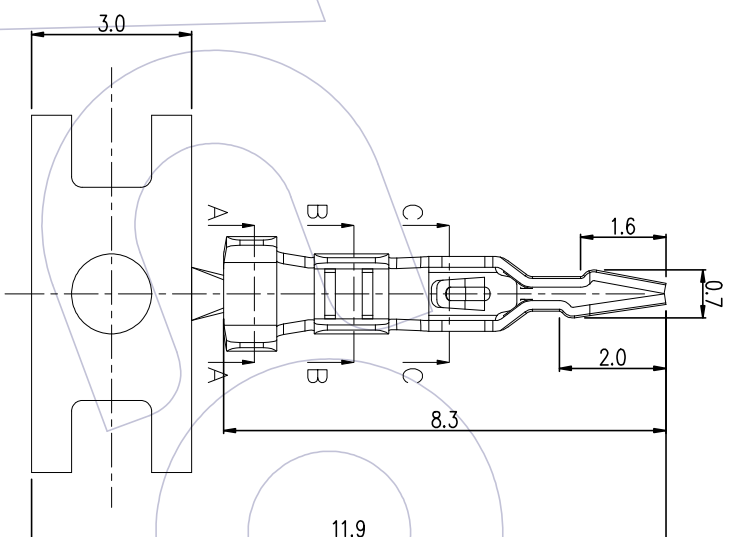

SECTION:A-A

SECTION:B-B

SECTION: C-C

[illegible]