


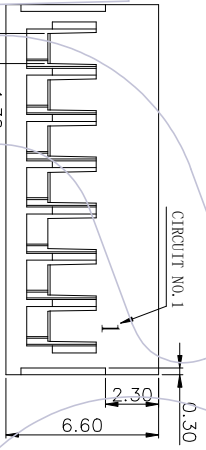


HSF

NOTES:
Rated Current:1.0A
Rated Voltage:100V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/Minute
Insulation Resistance:500MΩ min
Operation Temperature:−40℃ to+105℃
Material:PA66 UL94V−0




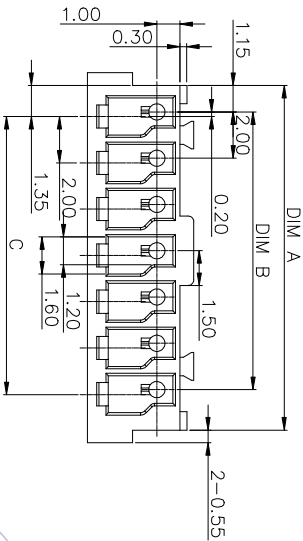


3D VIEW
REFERENCE

Ordering Information

WF2006 - H XX X 0 1

No. of pins
02P~16P
Color
W=White
Packing
0=PE Bag

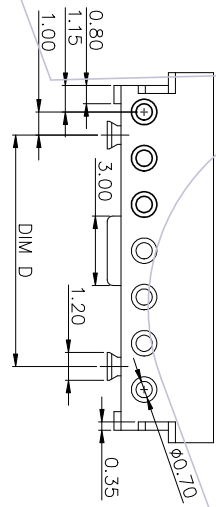

15	30.90	28.00	28.00	26.00
14	28.90	26.00	26.00	24.00
13	26.90	24.00	24.00	22.00
12	24.90	22.00	22.00	20.00
11	22.90	20.00	20.00	18.00
10	20.90	18.00	18.00	16.00
9	18.90	16.00	16.00	14.00
8	16.90	14.00	14.00	12.00
7	14.90	12.00	12.00	10.00
6	12.90	10.00	10.00	8.00
5	10.90	8.00	8.00	6.00
4	8.90	6.00	6.00	4.00
3	6.90	4.00	4.00	NA
2	4.90	2.00	2.00	NA
POS	DIM A	DIM B	DIM C	DIM D

		OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com			
A1	2019/09/12	Modify Drawing			X.XX	±0.40	Liu			UNIT	mm
A0	2008/08/04	NEW			X.XXX	±0.15	CHECK			SIZE	A4
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	1/1	Customer NO.	