

HSF

NOTES:





Rated Current: 5AMP  
Rated Voltage: 250V AC/DC  
Contact Resistance: 20mΩ max  
Withstand Voltage: 1500V AC/Minute  
Insulation Resistance: 1000MΩ min  
Operation Temperature: -40℃ to +105℃

Material: Phosphor Bronze  
Contact plating: Sn over Ni or Au over Ni  
Fit wire Range: 22#~26#AWG

Ordering Information

WF 2542 - TP XX 0 1

Material  
P=Phosphor bronze  
Contact Plating  
S0=Gold Flash/Tin  
S3=10u"Gold/Tin  
S4=15u"Gold/Tin  
S5=30u"Gold/Tin  
SN=Tin

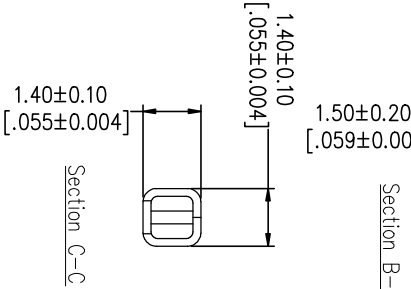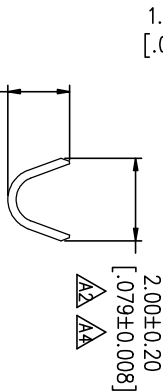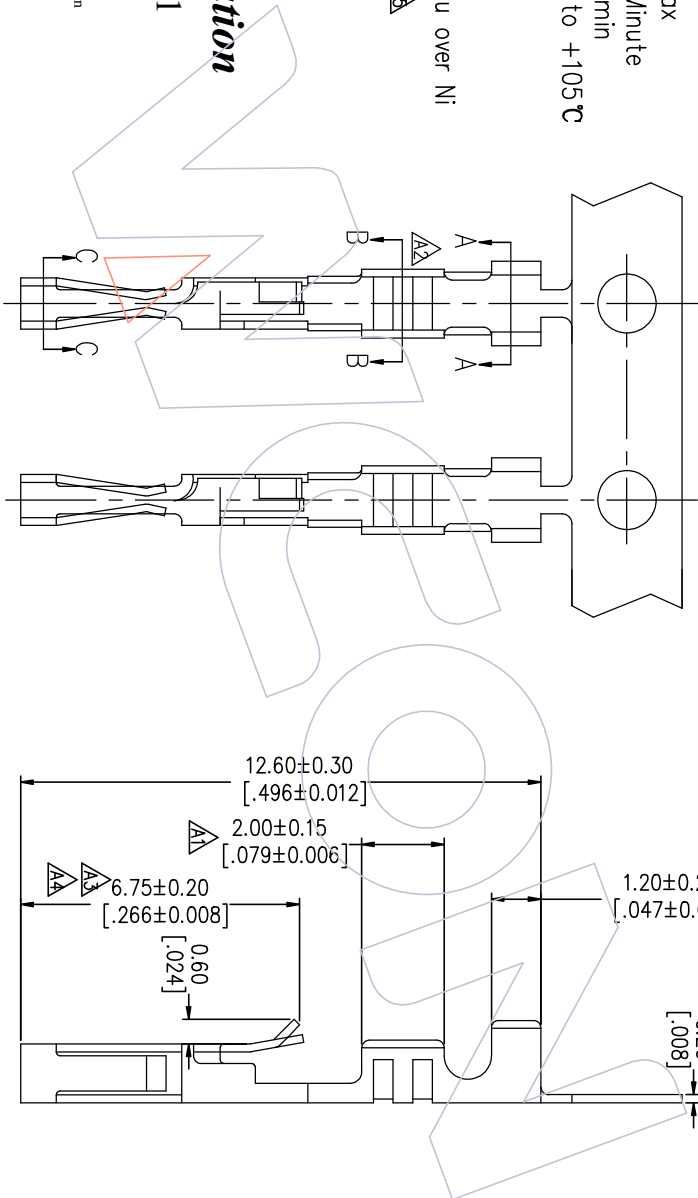

|     |            |                          |           |         |            |       |     |                              |               |  |
|-----|------------|--------------------------|-----------|---------|------------|-------|-----|------------------------------|---------------|--|
| A5  | 2019/10/17 | Add wire Range           | OPERATION | DRAW    | DATE       | SCALE | FIT | PART NO.                     | TITLE:        |  |
| A4  | 2017/12/05 | Modify drawing           | XX ±0.40  | SU      | 2019/10/17 | UNIT  | mm  | WF2542-TPXX01                |               |  |
| A3  | 2012/05/14 | Modify                   | XX ±0.25  | CHECK   | DATE       | SIZE  | A4  | 2.54mm CD-ROM WAFER TERMINAL | WC0N-Dongguan |  |
| AO  | 2008/07/09 | NEW                      | XXX ±0.15 |         |            | SHEET | 1/1 | Customer NO.                 |               |  |
| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE    | APPROVE | DATE       | PROJ. |     |                              | WC0N-Kunshan  |  |
| 1   |            |                          |           |         |            |       |     |                              |               |  |

WC0N

Http: www.wcon.com

Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sales@wcon.com

Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: sales@wcon.com