

HSF

NOTES:

Rated Current:3.0AMP

Contact Resistance: 20mΩ max

Withstand Voltage:1000V AC/DC



Insulation Resistance: 1000M Ω min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$


Contact Material:Brass

Contact Plating: Au or Sn Over Ni


Insulator Material: PBT+30%G.F UL94V-0

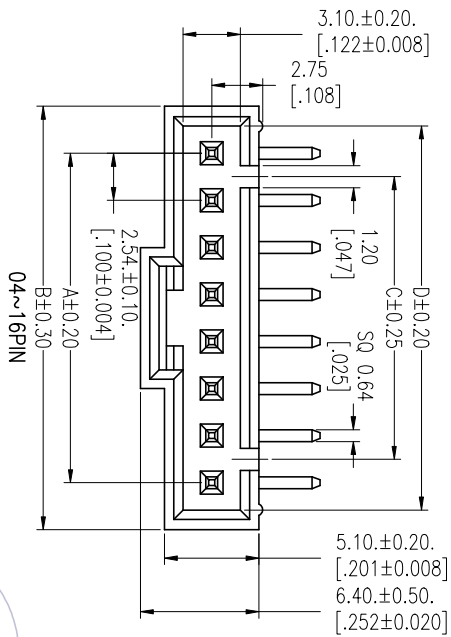

3PIN



2PIN




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

WF2542-WR XX X X 1No.of Pins
02~12Pin

02~12Pin W= White 0=PE Bag
 B= Black T=Tube
 G= Grey
 E= Beige

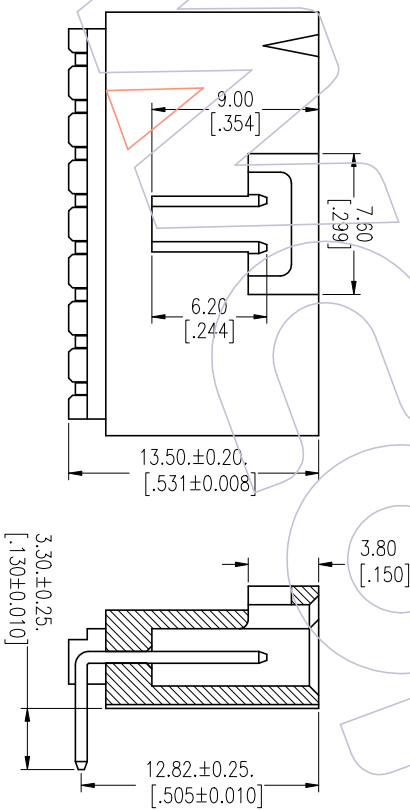

Circuit	Part No.	Dimension				Qty /Bag
		A	B	C	D	
02	WF2542-WR02X01	2.54	7.62	--	5.48	1,000
03	WF2542-WR03X01	5.08	10.16	--	8.02	1,000
04	WF2542-WR04X01	7.62	12.70	5.08	10.56	500
05	WF2542-WR05X01	10.16	15.24	7.62	13.10	500
06	WF2542-WR06X01	12.70	17.78	10.16	15.64	400
07	WF2542-WR07X01	15.24	20.32	12.70	18.18	400
08	WF2542-WR08X01	17.78	22.86	15.24	20.72	400
09	WF2542-WR09X01	20.32	25.40	17.78	23.26	250
10	WF2542-WR10X01	22.86	27.94	20.32	25.80	250
11	WF2542-WR11X01	25.40	30.48	22.86	28.34	250
12	WF2542-WR12X01	27.94	33.02	25.40	30.88	250
13	WF2542-WR13X01	30.48	35.56	27.94	33.42	200
14	WF2542-WR14X01	33.02	38.10	30.48	35.96	200
15	WF2542-WR15X01	35.56	40.64	33.02	38.50	200
16	WF2542-WR16X01	38.10	43.18	35.56	41.04	150



Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com