


HSF






NOTES:
 Rated Voltage:250V.
 Withstand Voltage:1500V AC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature: -55℃ to +105℃
 Material: PBT+G.F. UL94V-0,Black
 Mating Terminal: WD3810-3TD3XXXXXX

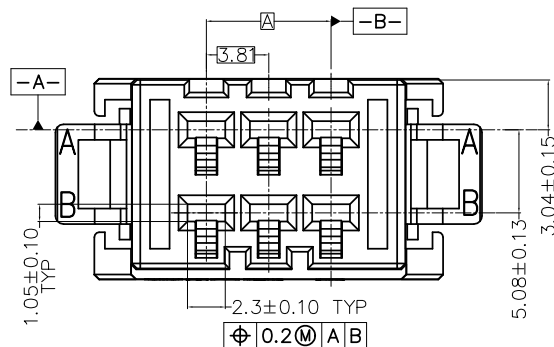

Part NO.	Pin	A	B	C	D	E
WD3810 -2H03B010X	2*3	7.62	16.70	19.37	21.32	26.07
WD3810 -2H04B010X	2*4	11.43	20.51	23.18	25.13	29.88
WD3810 -2H05B010X	2*5	15.24	24.32	26.99	28.94	33.69
WD3810 -2H06B010X	2*6	19.05	28.13	30.80	32.75	37.50
WD3810 -2H08B010X	2*8	26.67	35.75	38.42	40.37	45.12
WD3810 -2H10B010X	2*10	34.29	43.37	46.04	47.99	52.74

Ordering Information

WD3810 -2 H XX B 0 10 X
 Row: 2=Dual
 Receptacle Housing
 No. of Pins Per Row:
 03=3Pin,04=4Pin,
 05=5Pin,06=6Pin,
 08=8Pin,10=10Pin
 Housing Color:
 B=Black
 W="Wcon" logo
 M=Customer logo
 Blank=Without logo
 Foolproof Type:
 10=Symmetrical
 Packing:
 0=PE Bag

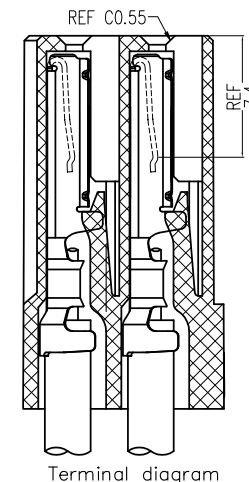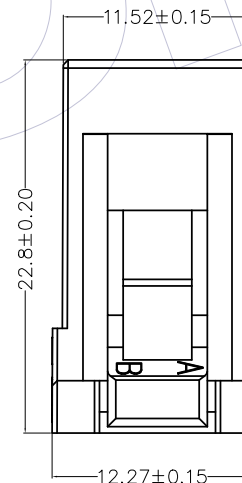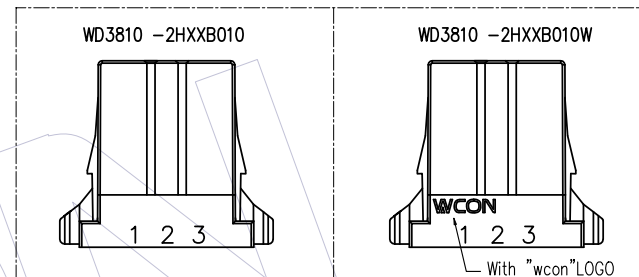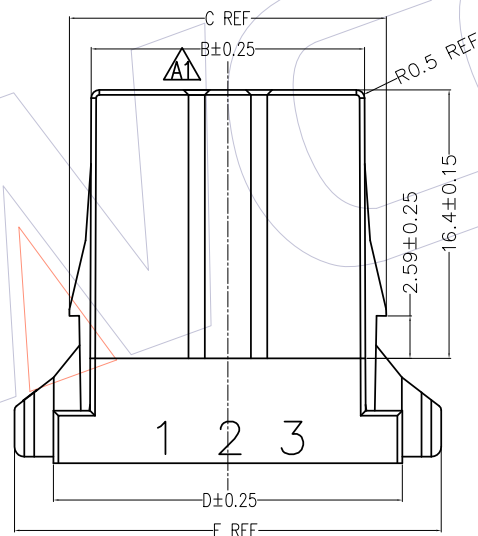

Terminal diagram

				OPERATION		DRAW OHJ	DATE	SCALE	Fit	PART NO. WD3810 -2HXXB010X	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.40		2021.09.08	UNIT	mm		
A1	2021.09.08	Change Dimension Tolerance	OHJ	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 3.81*5.08mm Dyn. Housing (T Type),Dual Row	
A0	2021.06.23	NEW		—	X.XXX			±0.15	SHEET		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO. -	
				DIM	TOL						

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com