

HSF

NOTES:

- Insulator material: PA9T+33%G.F, UL94 V-0;
- Terminal material: Copper Alloy;
Terminal Plating: Au/Sn Plated Over Nickel ;
- Rated Voltage: Power 600V;
- Rated Current: Power 30A; $\Delta 1$
- Contact Resistance:
Power 0.7m Ω Max; $\Delta 1$
- Insulation Resistance: DC500V
Power 10000M Ω Min; $\Delta 1$
- Insulation Withstand Voltage:
Power 2500VAC/1min; $\Delta 1$
- Durability :200 cycling;
- Operation Temperature: -20°C to +105°C;

P4MR A - XX XX X X A 1

No. Power:
01=1Pin
20=20Pin

Tail Options(DIP Type):
A=3.43mm
B=2.29mm
C=4.19mm









Power Contact Plated:
W3=10u" Gold /Matte Tin
W4=15u" Gold /Matte Tin
W5=30u" Gold /Matte Tin

Packing:
A=Tray

Fixed Mode:
M: W/T Lock
N: W/O Lock

Product Data Sheet

No.	P/N	No. Power	DIM "A"	DIM "B"	DIM "C"	DIM "F"
1	P4MRA-16XXXXA1	16	118.10	110.49	109.22	113.87
2	P4MRA-12XXXXA1	12	92.71	85.09	83.82	88.47
3	P4MRA-11XXXXA1	11	86.36	78.74	77.47	82.12
4	P4MRA-10XXXXA1	10	80.01	72.39	71.12	75.77
5	P4MRA-09XXXXA1	9	73.66	66.04	64.77	69.42
6	P4MRA-08XXXXA1	8	67.31	59.69	58.42	63.07
7	P4MRA-07XXXXA1	7	60.96	53.34	52.07	56.72
8	P4MRA-06XXXXA1	6	54.61	46.99	45.72	50.37
9	P4MRA-05XXXXA1	5	48.26	40.64	39.37	44.02
10	P4MRA-04XXXXA1	4	41.91	34.29	33.02	37.67
11	P4MRA-03XXXXA1	3	35.56	27.94	26.67	31.32
12	P4MRA-02XXXXA1	2	29.21	21.59	20.32	24.97

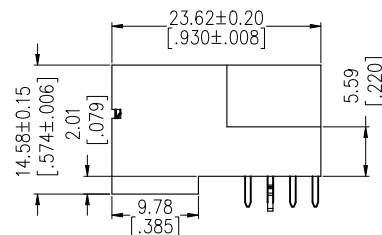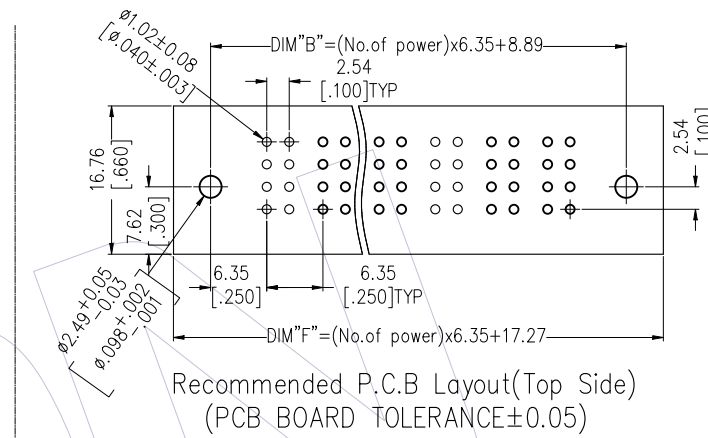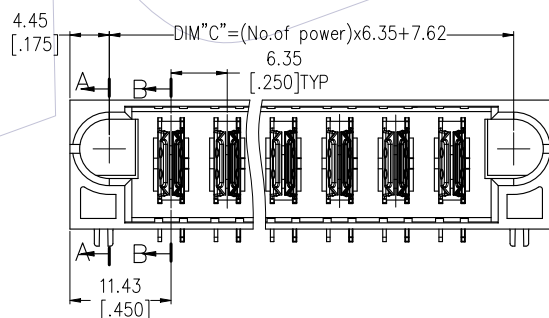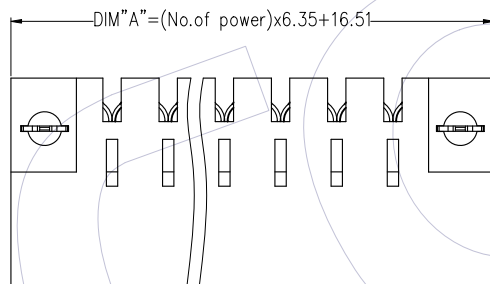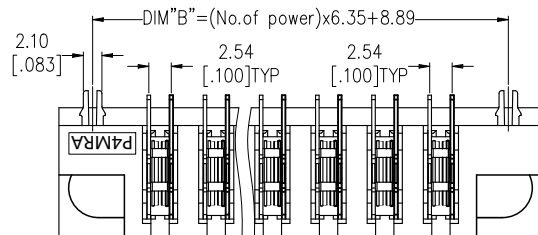

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A2	2024/09/04	Cancel Xu"Gold/Tin Plated	XSR	x.x ±0.40	XSR	2024/09/04	UNIT	mm	P4MRA-XXXXXXA1	PSP Spacing A 90° DIP MALE	
A1	2022/03/28	Modify Notes	—	x.xx ±0.25	CHECK	DATE	SIZE	A4		(TYPE-4:Power)	
A0	2018/10/10	NEW	—	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°			PROJ.				
				DIM TOL							

WCON
Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
Tel: +86 769 85358920 Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com