
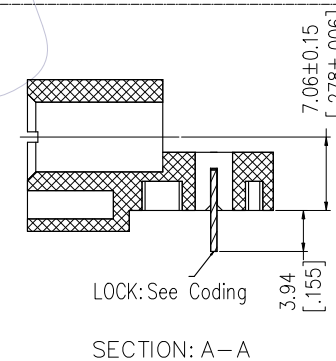
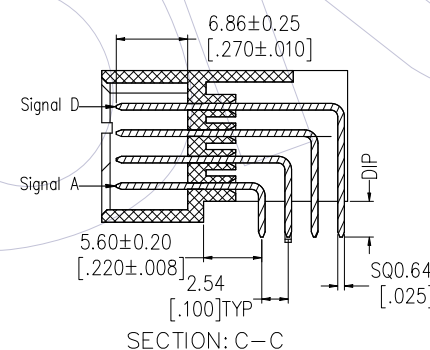
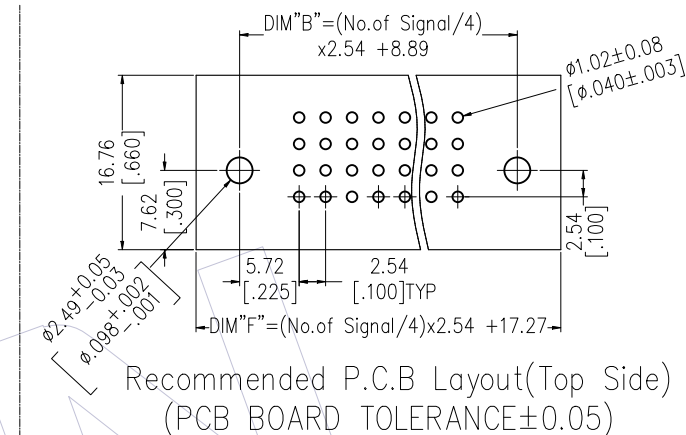
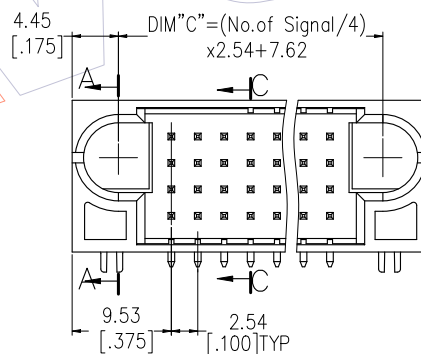
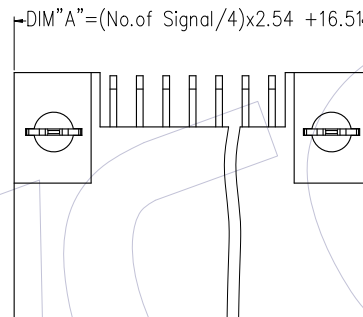


HSF

NOTES:

1. Insulator material: PA9T+33%G.F, UL94 V-0;
2. Terminal material: Copper Alloy;
Terminal Plating: Au/Sn Plated Over Nickel ;
3. Rated Voltage: Signal 50V; $\Delta 1$
4. Rated Current: Signal 2.5A; $\Delta 1$
5. Contact Resistance:
Signal 20m Ω Max; $\Delta 1$
6. Insulation Resistance: DC500V
Signal 500M Ω Min; $\Delta 1$
7. Insulation Withstand Voltage:
Signal 1000VAC/1min ; $\Delta 1$
8. Durability :200 cycling;
9. Operation Temperature:-20°C to +105°C;

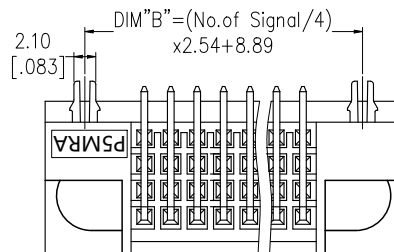

P5MR A - XXX XX

No. Signal:
004=4Pin
008=8Pin
100=100Pin
104=104Pin
144=144Pin
148=148Pin

Signal Contact Plated:

W3=10u" Gold /Matte Tin
W4=15u" Gold /Matte Tin
W5=30u" Gold /Matte Tin $\Delta 2$

Tail Options(DIP Type):
A=3.43mm
B=2.29mm
C=4.19mm

Fixed Mode:
M: W/T Lock
N: W/O Lock

Packing:
A=Tray

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
A2	2024/09/04	Cancel Xu"Gold/Tin Plated	XSR	x.x ± 0.40	XSR	2024/09/04	UNIT	mm	P5MRA-XXXXXXXA1		
A1	2022/03/28	Modify Notes	PAN	x.xx ± 0.25	CHECK	DATE	SIZE	A4	TITLE:		
A0	2018/10/15	NEW	---	x.xxx ± 0.15		DATE	SHEET	1/1	PSP Spacing A 90° DIP MALE (TYPE-5: 2.54 Signal)		
				Angle $\pm 3^\circ$	APPROVE	DATE	PROJ.		Customer NO.		
				DIM TOL							