

HSF

NOTES:

- Insulator material: PA9T+33%G.F, UL94 V-0;
- Terminal material: Copper Alloy;
Terminal Plating: Au/Sn Plated Over Nickel ;
- Rated Voltage: Signal 50V;
- Rated Current: Signal 2.5A; $\Delta 1$
- Contact Resistance:
Signal 20m Ω Max; $\Delta 1$
- Insulation Resistance: DC500V
Signal 500M Ω Min; $\Delta 1$
- Insulation Withstand Voltage:
Signal 1000VAC/1min ; $\Delta 1$
- Durability :200 cycling;
- Operation Temperature: -20°C to +105°C;

P5MS A - XXX XX X X A 1








No. Signal:
004=4Pin
008=8Pin
100=100Pin
104=104Pin
144=144Pin
148=148Pin

Signal Contact Plated:
W3=10u" Gold /Matte Tin
W4=15u" Gold /Matte Tin
W5=30u" Gold /Matte Tin $\Delta 2$

Tail Options(DIP Type):
A=3.43mm
B=2.29mm
C=4.19mm

Fixed Mode:
M: W/T Lock
N: W/O Lock

Packing:
A=Tray

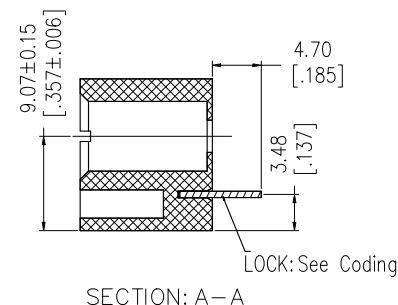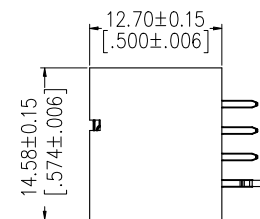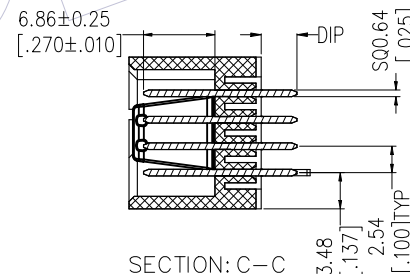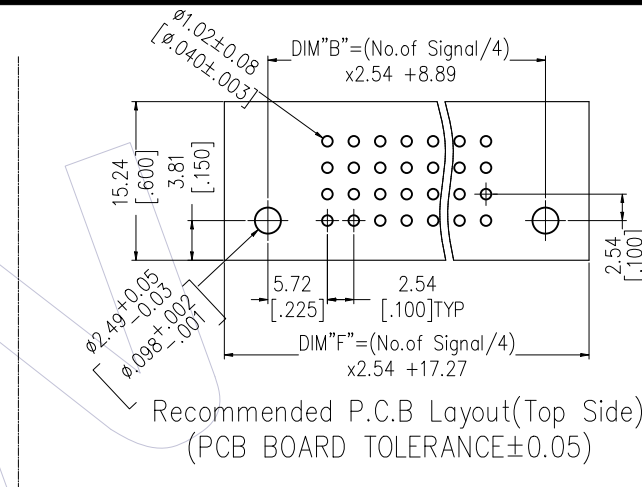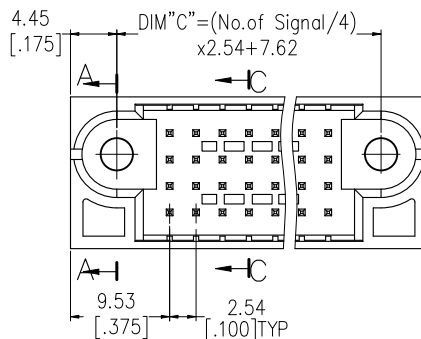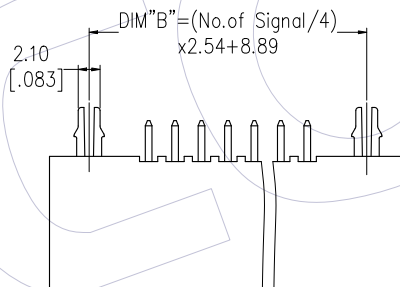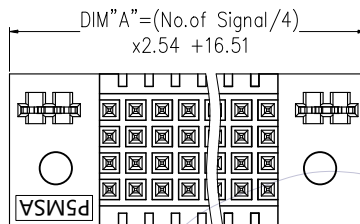

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A2	2024/09/04	Cancel Xu"Gold/Tin Plated	XSR	X.X ±0.40	XSR	2024/09/04	UNIT	mm	P5MSA-XXXXXXXA1	PSP Spacing A 180° DIP MALE	
A1	2022/03/28	Modify Notes		X.XX ±0.25	CHECK	DATE	SIZE	A4		(TYPE-5: 2.54 Signal)	
A0	2018/10/15	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET	1/1			
				Angle ± 3°			PROJ.				
				DIM TOL							

WCON
Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
Tel: +86 769 85358920 Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com