

HSF

Rated Current: See Table A2

Contact Resistance: 20m Ω

Withstand Voltage:1500V AC/Minute


Insulation Resistance: 1000M Ω min

Operation temperature: -40°C to $+105^{\circ}\text{C}$


Table 2:

Size Wire	Rated Current
AWG#16	9A
AWG#18	9A
AWG#20	7A
AWG#22	5A
AWG#24	4A


Ordering Information

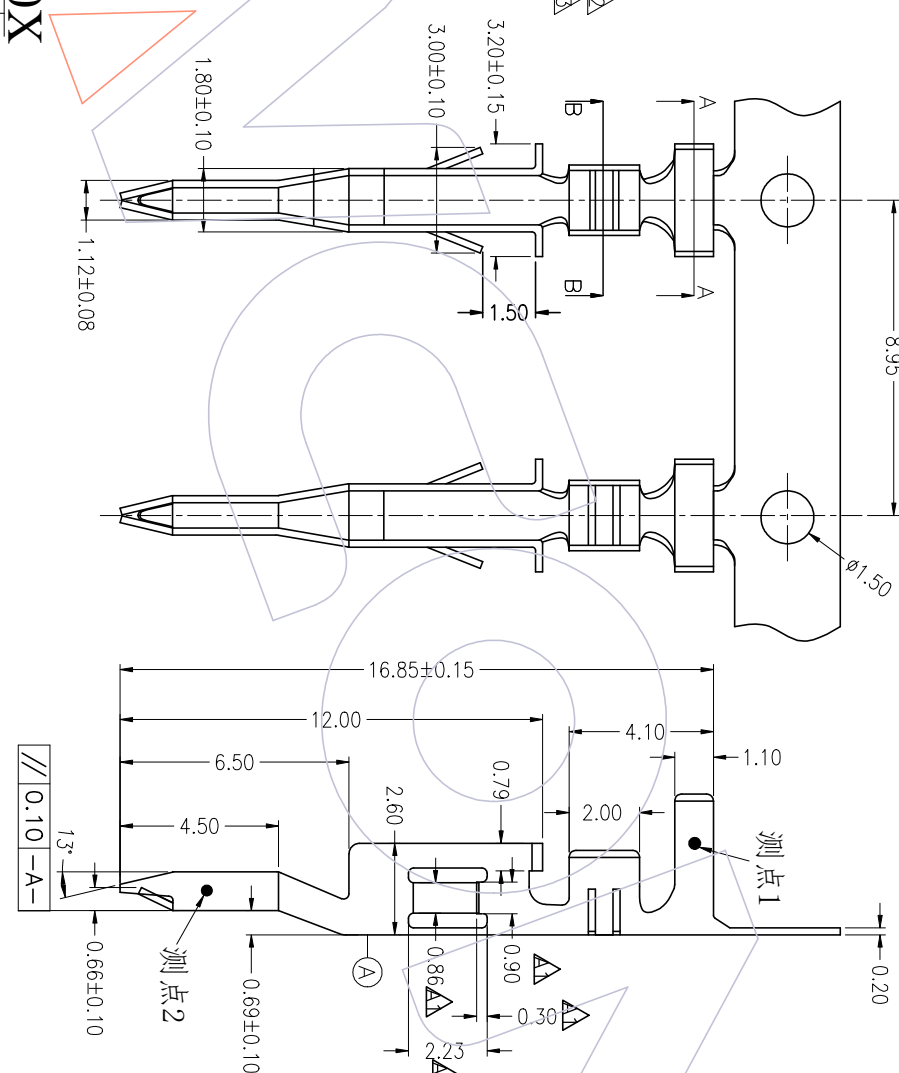WF4202 - M T X ~~XX~~ ~~0X~~Table 1: Dimensional & Ordering Information

Part No.	Thickness	Finish	Wire Range	Insulation O.D	Q'ty/Reel
WF4202-MTXXX03	0.20	Gold/Tin-Plated	AWG#20~#24	1.80mm(Max)	5,000pcs
WF4202-MTXXX01	0.20	Gold/Tin-Plated	AWG#16~#20	3.10mm(Max)	5,000pcs

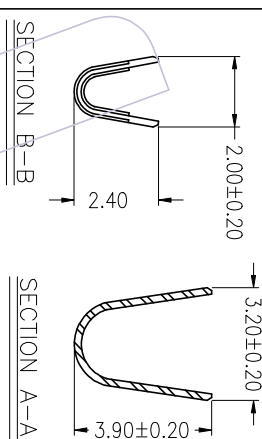

WF4202-MTXXXX01

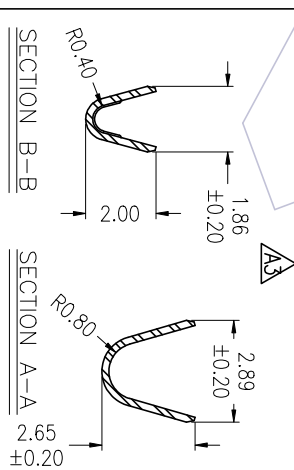

WF4202-MTXXX03

A3	2025/02/20	ADD: TYPE U3,AND TABLE 1 A3	QCX	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2024/05/13	Modify Rated Current:See Table	CP	X.X	CP	2024/05/13	UNIT	inch	SEE TABLE
A1	2021/12/14	Add Link Stopper	PAN	X.XX	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/09/17	NEW	——	X.XXX	±0.15	DATE	SHEET	1/1	4. 20 TERMINAL MALE
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.		Customer NO.
 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sdles@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sdles@wcon.com									



Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

FAX: +86 769 85358915
 E-mail: sales@wcon.com

E-mail: sales@wcoll.com	E-mail: sales@wcoll.com
--	--