


HSF

NOTES:  A1
Rated Current:3.0A AMP
Rated Voltage:250V AC/minute
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to+105℃
Material:PA66 UL94V-0
Use with:WF2005-T
Mated With:WF2005-Wafer

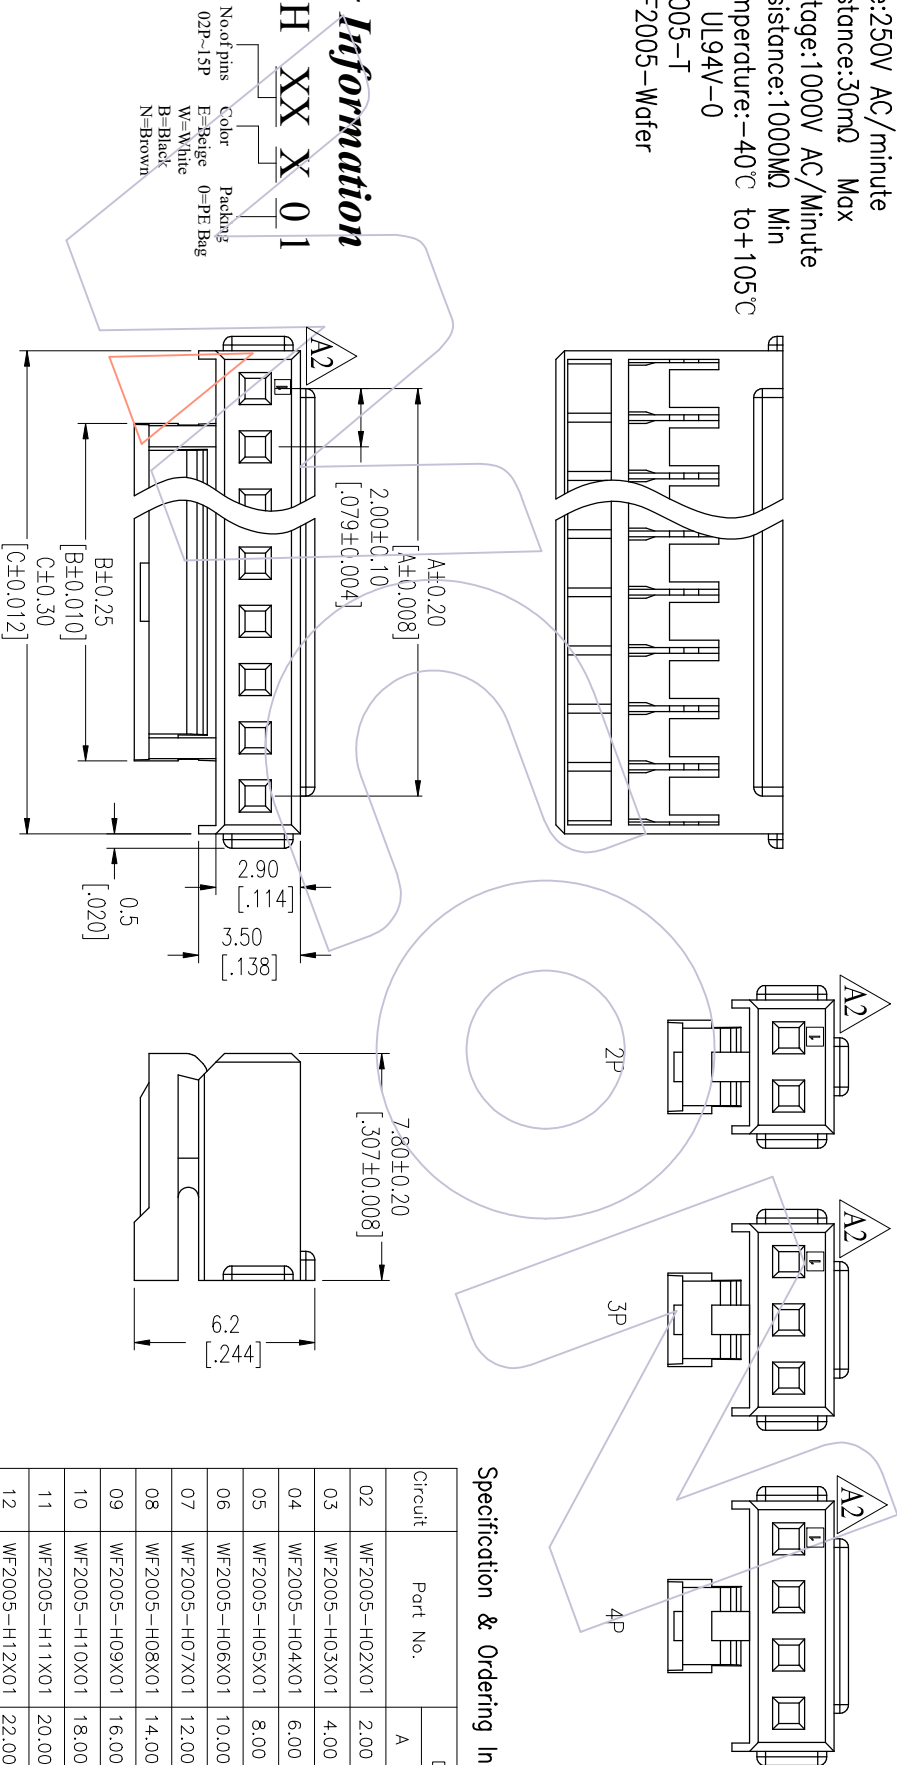

Specification & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF2005-H02X01	2.00	3.20	4.60
03	WF2005-H03X01	4.00	3.20	6.60
04	WF2005-H04X01	6.00	3.20	8.60
05	WF2005-H05X01	8.00	5.60	10.60
06	WF2005-H06X01	10.00	7.60	12.60
07	WF2005-H07X01	12.00	9.60	14.60
08	WF2005-H08X01	14.00	11.60	16.60
09	WF2005-H09X01	16.00	13.60	18.60
10	WF2005-H10X01	18.00	15.60	20.60
11	WF2005-H11X01	20.00	17.60	22.60
12	WF2005-H12X01	22.00	19.60	24.60
13	WF2005-H13X01	24.00	21.60	26.60
14	WF2005-H14X01	26.00	23.60	28.60
15	WF2005-H15X01	28.00	25.60	30.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		PART NO.
				X.X	±0.40	CP		UNIT	FT	
A2	2024/11/22	Add PIN1 Mark	—	X.XX	±0.25	CHECK	2024/05/29	A4	1/1	SEE TABLE
A1	2024/05/29	Modify	—	X.XXX	±0.15	—	—	—	—	—
A0	2012/09/05	NEW	—	—	—	—	—	—	—	—
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE	DATE	SHEET	PROJ.	Customer NO.



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com