




NOTES: $\triangle A4$
Rated Current: 3.0A AMP
Rated Voltage: 250V AC/Minute
Contact Resistance: 30m Ω max
Withstand Voltage: 1000V AC/Minute
Insulation Resistance: 1000M Ω Min
Operation Temperature: -40℃ to +105℃

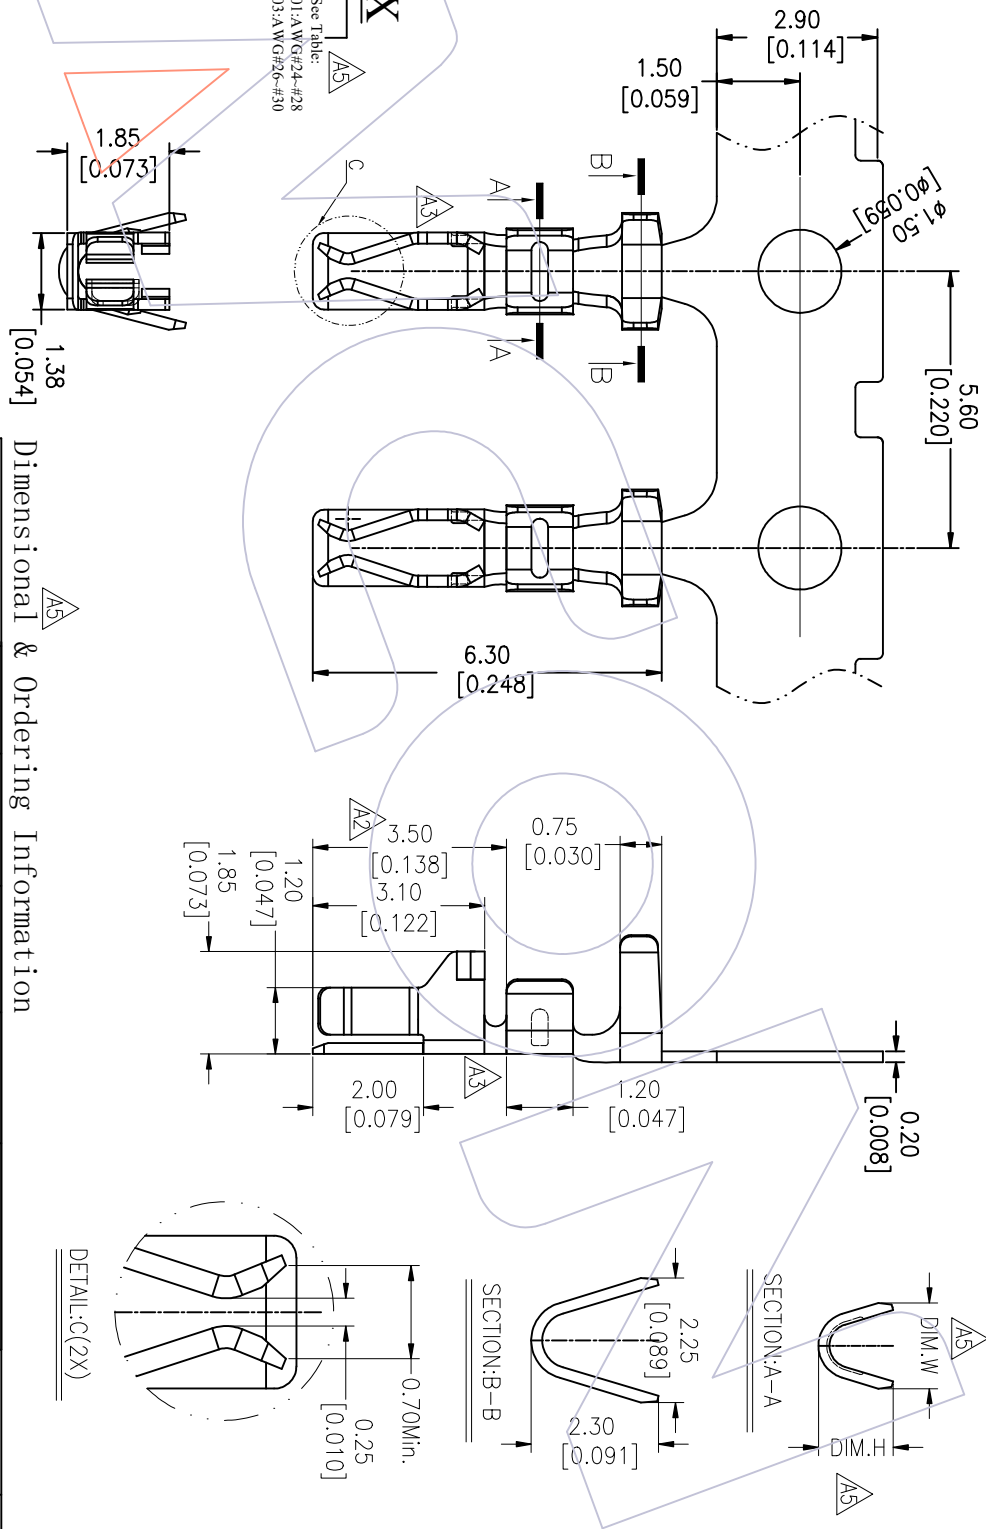

Ordering Information

WF2005 - TP XX 0X

Contact Plating:
SN=Tim
See Table:
01:A:WG#24-#28
03:A:WG#26-#30

Dimensional & Ordering Information

Part No.	Thickness	DIM.W (mm)	DIM.H (mm)	Finish	Material	Wire Range	Q'ty/Reel
WF2005-TPSN01	0.20	1.55	1.35	Tin-Plated	Phosphor bronze	AWG#24~#28	10,000pcs
WF2005-TPSN03	0.20	1.43	1.21	Tin-Plated	Phosphor bronze	AWG#26~#30	10,000pcs

A5	2025/03/26	ADD 03 TYPE	$\triangle A5$	QCX	OPERATION	DRAW	PART NO.	TITLE: YH 2.00 TERMINAL	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A4	24/05/29	Modify	—	X.X	± 0.40	CP	DATE 24/05/29			
A3	13/03/06	Modify Drawing	—	X.XX	± 0.25	CHECK	DATE			
A0	08/07/04	NEW	—	X.XXX	± 0.15	APPROVE	DATE			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	Angle $\pm 3^\circ$	TOL	PROJ.	Customer NO.		
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

