
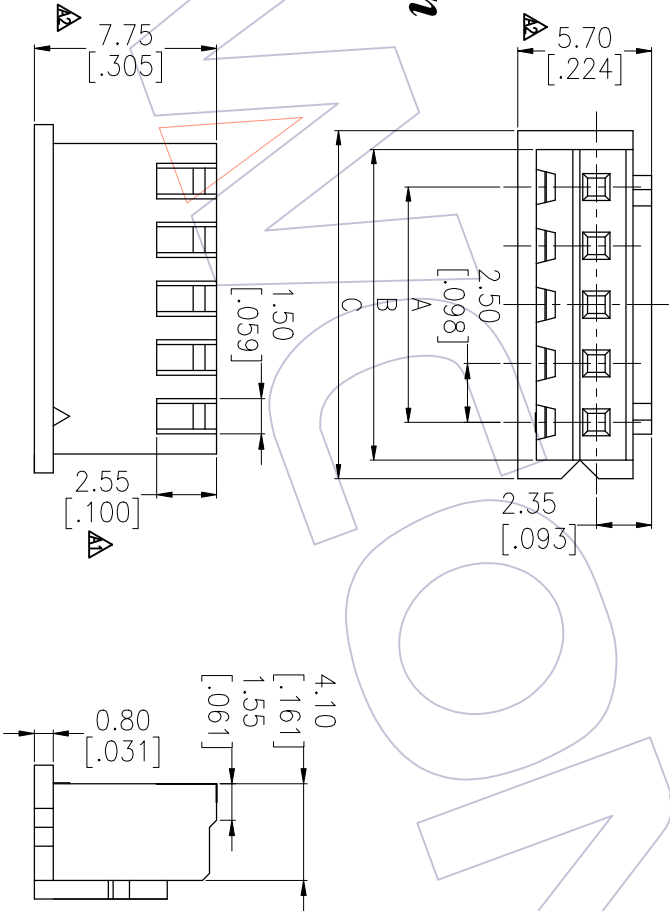


NOTES:

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃
Insulator Material:PA66(UL94V-0)

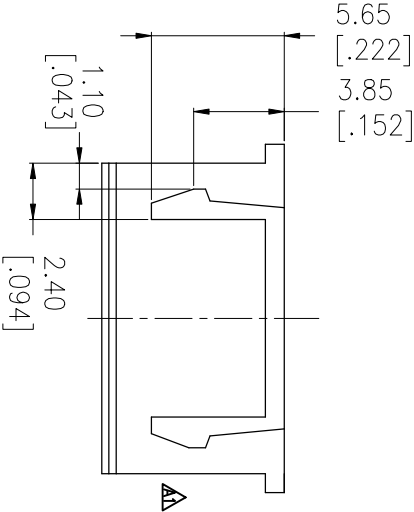

Ordering Information

WF2501-H XX W 01

Terminal Shape
H:HOUSING
No. of Pins
02-20P
Color
W=White

Circuit	A	B	C
02	2.5	5.7	7.3
03	5.0	8.2	9.8
04	7.5	10.7	12.3
05	10.0	13.2	14.8
06	12.5	15.7	17.3
07	15.0	18.2	19.8
08	17.5	20.7	22.3
09	20.0	23.2	24.8
10	22.5	25.7	27.3
11	25.0	28.2	29.8
12	27.5	30.7	32.3
13	30.0	33.2	34.8
14	32.5	35.7	37.3
15	35.0	38.2	39.8
16	37.5	40.7	42.3
20	47.5	50.7	52.3

A2	2024/08/28			OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2019/07/15	Add Size	DuYing	X.X	DuYing	2024/08/28	UNIT	mm	WF2501-HXXXW01
A0	2012/02/13	Modify the drawing	Ding	X.XX	CHECK	DATE	SIZE	A4	TITLE:
REV	DATE	NEW	—	X.XXX	APPROVE	DATE	SHEET	1/1	"J" XH2.50 HOUSING
		MODIFICATION DESCRIPTION	CHANGE	Angle			PROJ.		Customer NO.
				± 3°					
				TOL					

WCON-Dongguan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408

Fax: +86 512 57468468

E-mail: wconks@wcon.com

Http: www.wcon.com

WCON