

HSF

NOTES:

Rated Current:3.0AMP.

Rating Voltage:250V AC/DC

Contact Resistance:20mΩ Max.

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min.

Operation Temperature:-40℃ to +105℃

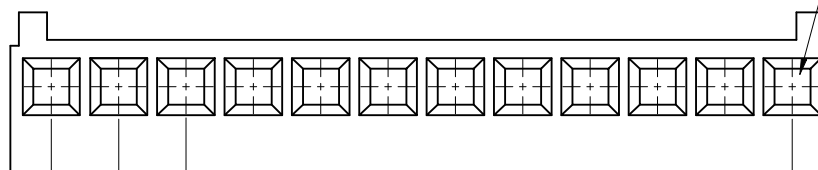
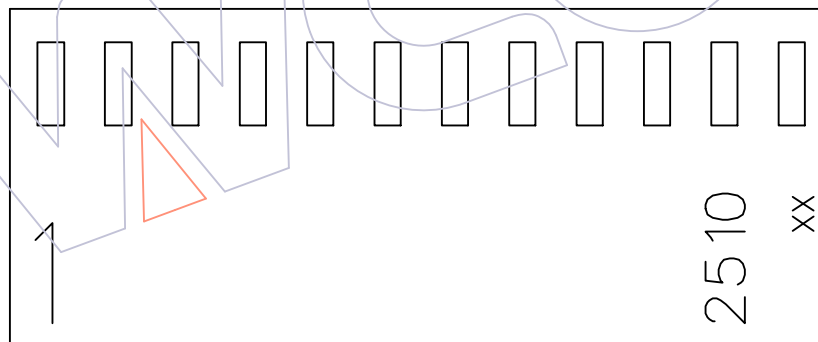
Insulator Material:PA66

Use with:WF2541-T

Mated with:WF2541-Wafer

Ordering Information

WF2541 - H XX X 0 1

No.of Pins
11~16PColour
E= BeigePacking
0= PE Bag 2.54 ± 0.10
[.100 ± 0.004] $2.54 \times \text{No. of Positions} - 2.54 \pm 0.20$
[.100 × No. of Positions - .100 ± 0.008] $2.54 \times \text{No. of Positions} + 0.50 \pm 0.30$
[.100 × No. of Positions + .020 ± 0.012] 12.70 ± 0.25
[.500 ± 0.010] 6.10 ± 0.20
[.240 ± 0.008] 7.80 ± 0.30
[.307 ± 0.012] 4.85 ± 0.20
[.191 ± 0.008]

				OPERATION		DRAW BAO	DATE 2025/05/10	SCALE	FIT	PART NO. WF2541-HXXX01 (11-16PIN)	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.40		CHECK	DATE	UNIT		
				X.XX	±0.25	APPROVE			DATE	SIZE	
AO	2025/05/10	NEW	BAO	X.XXX	±0.15		DIM	TOL		SHEET	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	PROJ.					