

HSF

NOTES:

Rated Current:3.0AMP.

Rating Voltage:250V AC/DC

Contact Resistance:20mΩ Max.

Withstand Voltage:1000V AC/DC

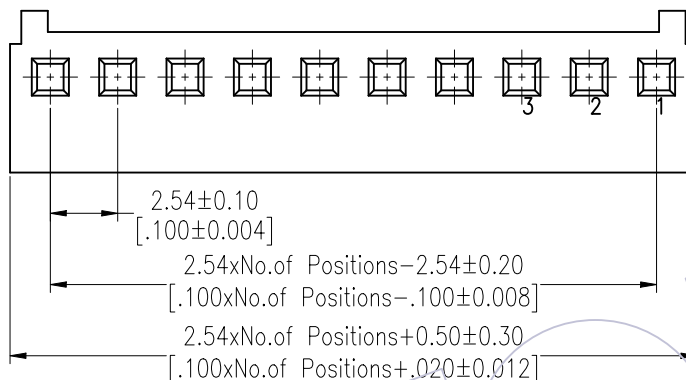
Insulation Resistance:1000MΩ Min.

Operation Temperature:-40℃ to +105℃

Insulator Material:PA66 UL94V-0

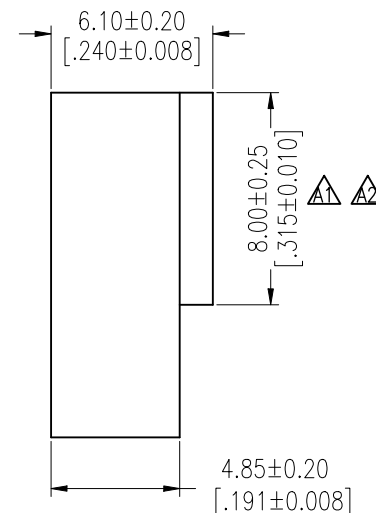
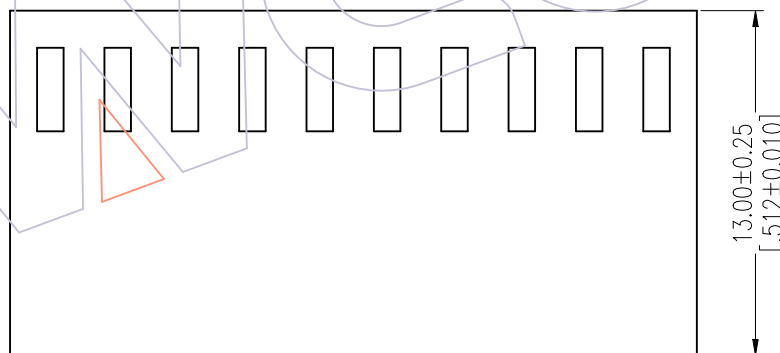
Use with:WF2541-T

Mated with:WF2541-Wafer



Ordering Information

WF2541 - H XX X 0 1

No. of Pins
02~10PColour
E= BeigePacking
0= PE Bag

A3	2025/05/09	MODIFY	BA0	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com	
A2	2020/08/11	MODIFY THE DIM	—	X.X ±0.40	BA0	2025/05/09	UNIT	mm	WF2541-HXXX01 (2-10PIN)		
A1	2013/09/02	MODIFY THE DIM	JYHuang	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com	
AO	2012/09/07	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	"M" TYPE 2.54mm Housing		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL			PROJ.		Customer NO.		