

HSE

NOTES:

Rated Current: 3.0AMP

Contact Resistance: 20m Ω max




Withstand Voltage: 1000V AC/DC

Operation Temperature: -55°C to $+125^{\circ}\text{C}$

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: LCP+30%G.F UL94V-0

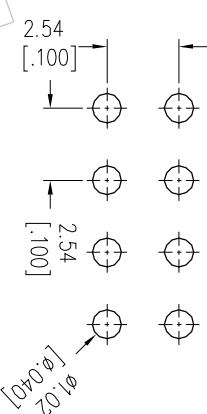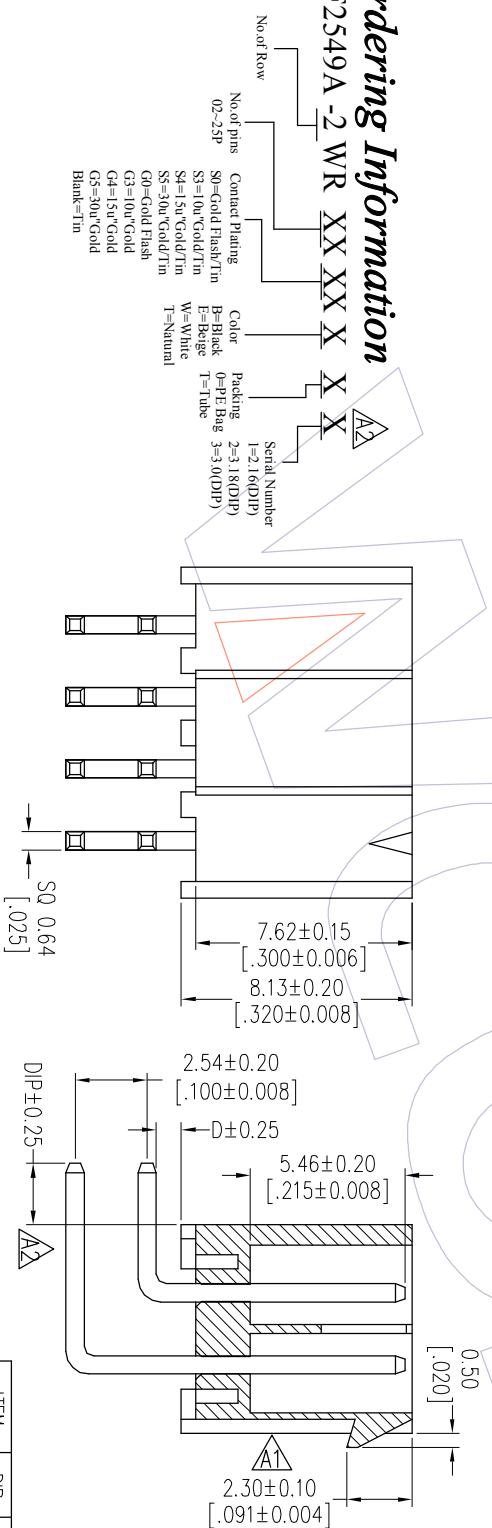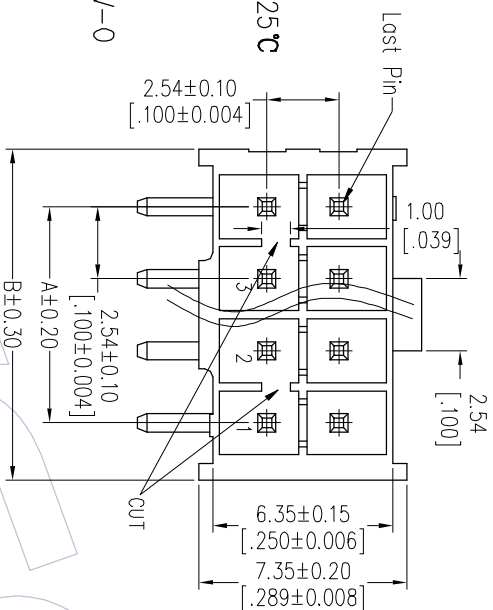

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2A02	WF2549A-2MR02XXXXX	2.54	6.60
2A03	WF2549A-2MR03XXXXX	5.08	9.14
2A04	WF2549A-2MR04XXXXX	7.62	11.68
2A05	WF2549A-2MR05XXXXX	10.16	14.22
2A06	WF2549A-2MR06XXXXX	12.70	16.76
2A07	WF2549A-2MR07XXXXX	15.24	19.30
2A08	WF2549A-2MR08XXXXX	17.78	21.84
2A09	WF2549A-2MR09XXXXX	20.32	24.38
2A10	WF2549A-2MR10XXXXX	22.86	26.92
2A11	WF2549A-2MR11XXXXX	25.40	29.46
2A12	WF2549A-2MR12XXXXX	27.94	32.00
2A13	WF2549A-2MR13XXXXX	30.48	34.54
2A14	WF2549A-2MR14XXXXX	33.02	37.08
2A15	WF2549A-2MR15XXXXX	35.56	39.62
2A16	WF2549A-2MR16XXXXX	38.10	42.16
2A17	WF2549A-2MR17XXXXX	40.64	44.70
2A18	WF2549A-2MR18XXXXX	43.18	47.24
2A19	WF2549A-2MR19XXXXX	45.72	49.78
2A20	WF2549A-2MR20XXXXX	48.26	52.32
2A21	WF2549A-2MR21XXXXX	50.80	54.86
2A22	WF2549A-2MR22XXXXX	53.34	57.40
2A23	WF2549A-2MR23XXXXX	55.88	59.94
2A24	WF2549A-2MR24XXXXX	58.42	62.48
2A25	WF2549A-2MR25XXXXX	60.96	65.02

Ordering Information

WF2549A -2 WR XX XX X

No. of Row

No. of pins	Contact Plating
02~25P	S0=Gold Flash/Tin

E=Beige I=Iube
W=White

 $I = \mathbb{N}$ Natural

FLY Serial Number

Specific Drawings

ADDENDUM

NEW

DESCRIPTION

3

WYCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
---------------	--------------

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 69 85358915	Fax: +86 512 5/468468
E-mail: sales@nucan.com	E-mail: sales@nucan.com

E-mail: sals@sbcuill.com	E-mail: sals@sbcuill.com
--	--