

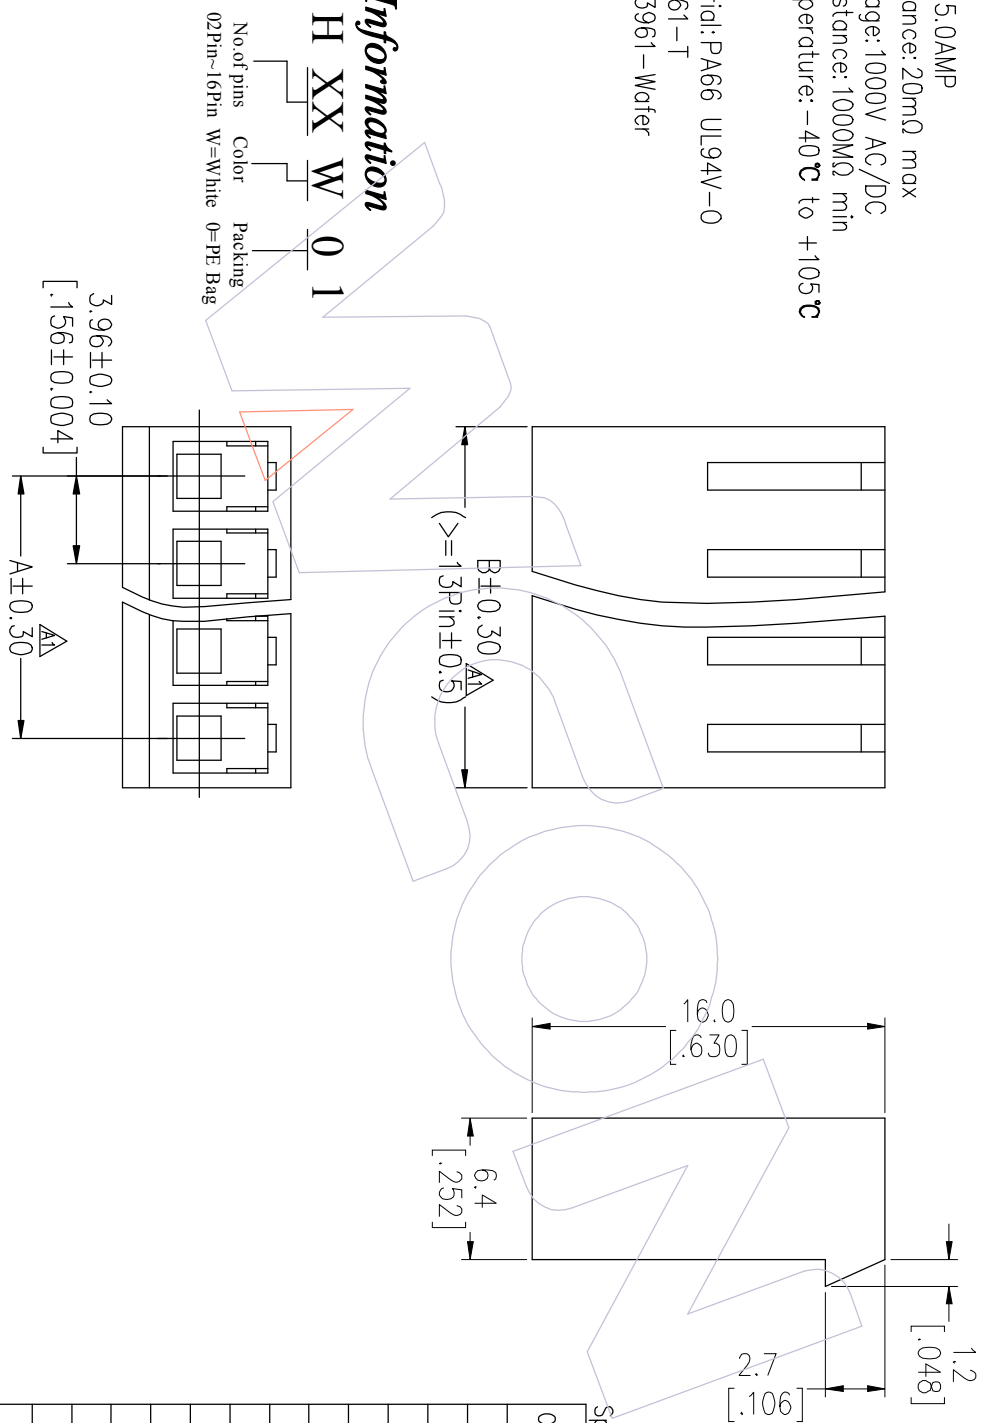
HSF

NOTES:

Rated Current: 5.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: -40℃ to +105℃

Insulator Material: PA66 UL94V-0
Use with: WF3961-T
Mated with: WF3961-Wafer

Ordering Information

WF 3961 - H XX W 0 1

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF3961-H02W01	3.96	8.22
03	WF3961-H03W01	7.92	12.18
04	WF3961-H04W01	11.88	16.14
05	WF3961-H05W01	15.84	20.10
06	WF3961-H06W01	19.80	24.06
07	WF3961-H07W01	23.76	28.02
08	WF3961-H08W01	27.72	31.98
09	WF3961-H09W01	31.68	35.94
10	WF3961-H10W01	35.64	39.90
11	WF3961-H11W01	39.60	43.86
12	WF3961-H12W01	43.56	47.82
13	WF3961-H13W01	47.52	51.78
14	WF3961-H14W01	51.48	55.74
15	WF3961-H15W01	55.44	59.70
16	WF3961-H16W01	59.40	63.66

PD4035

[illegible]