

HSF

NOTES:

Rated Current:See Table $\Delta 1$

Contact Resistance:30m Ω max

Withstand Voltage:1000V AC/Minute

Insulation Resistance:1000M Ω min



Operation Temperature:-40℃ to+105℃

Contact Material:Brass

Contact Plating:Au Or Sn over Ni

Insulator Material:PA66


Size Wire	Ckt	2&3	4-6
AWG#18	9A	8A	
AWG#20	7A	6A	
AWG#22	5A	4A	
AWG#24	4A	3A	

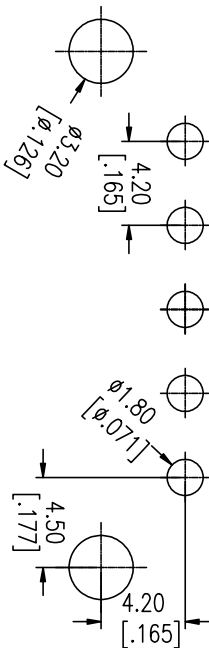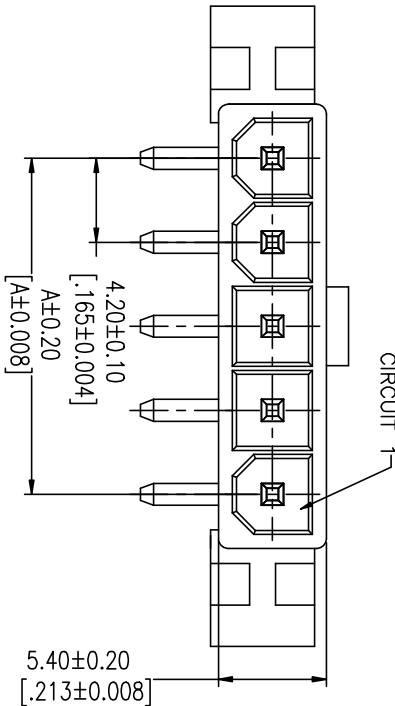

Ordering Information

WF4202 -1 WR XX W 0 3

No. of pins 02-03P
Contact Plating S0=Gold Flash/Tin B=Black T=Natural 0=PE Bag
Color W=White T=Tube
Packing S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

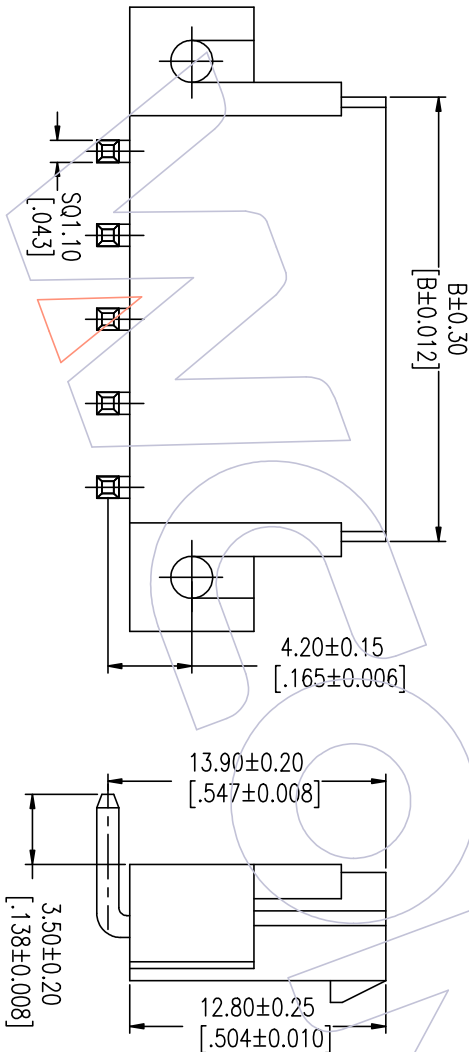

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF4202-1WR02WO3	4.20	9.60
03	WF4202-1WR03WO3	8.40	13.80
04	WF4202-1WR04WO3	12.60	18.00
05	WF4202-1WR05WO3	16.80	22.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	SEE TABLE	WCON
A1	2024/05/13	Modify Rated Current:See Table	CP	X.X	±0.40	2024/05/13	UNIT	mm	TITLE: 4.20 WATER SINGLE ROW 90° DIP		Http: www.wcon.com
AO	2012/09/17	NEW	JYHuang	X.XXX	±0.25		SIZE	A4			
				Angle	± 3°		SHEET	1/1	Customer NO.		WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
							PROJ.				
											WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com