

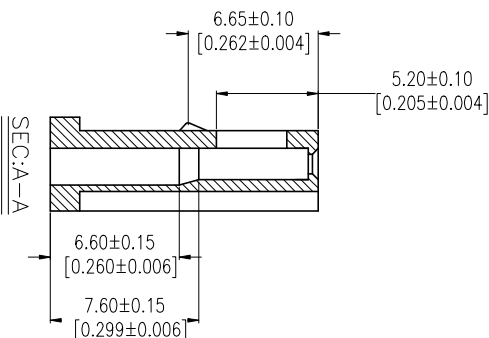
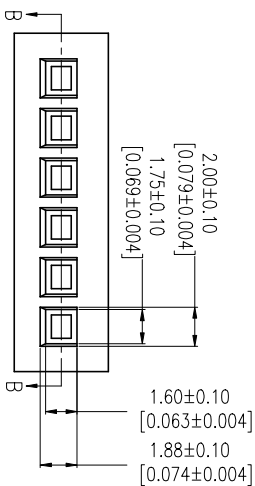
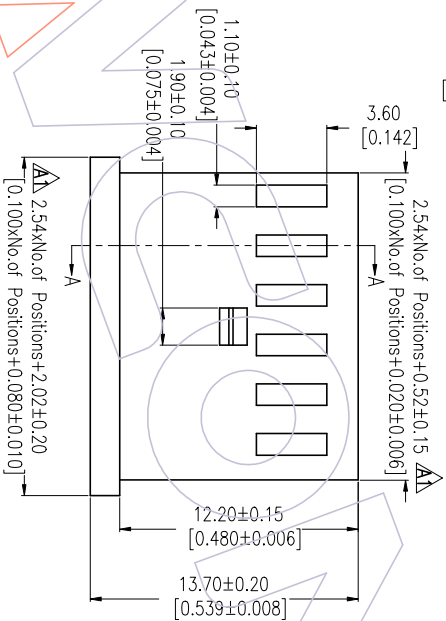


HSF

NOTES:

Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃
Insulator Material:PTI+30%G.F.(UL94V-0)
Use with:WF2548-T
Mated With:WF2548-Wafer

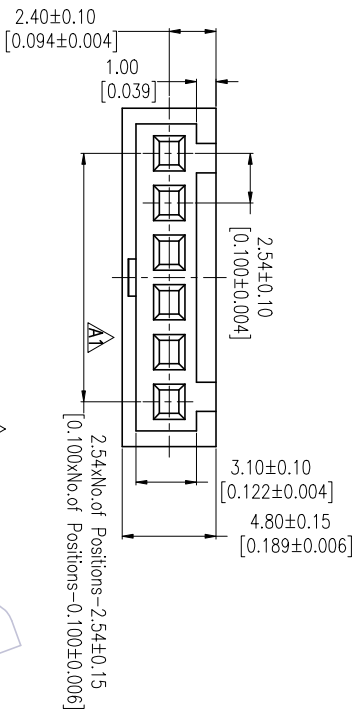

Ordering Information

WF2548-1 H XX B 0 1

No. of Pins Per Row:
02P~22P

Packing
0=PE Bag

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCN-Dongguan	WCN-Kunshan
				X.X	±0.40	Dwg		UNIT					
A1	2017/02/27	Modify	Δ	X.XX	±0.25	CHECK	DATE	SIZE	A4	2.54 Single Row T Type Housing		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2012/09/08	NEW	—	X.XXX	±0.15	Angle	DATE	SHEET	1/1	Customer NO.		Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.				E-mail: sales@wcon.com	E-mail: sales@wcon.com

WCON

Http: www.wcon.com

WCN-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCN-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com