

HSF

NOTES:

Current Rating: 5.0 AMP

Voltage Rating: 250V AC/DC

Temperature Range: -40℃ to +105℃

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.



Withstanding Voltage: 1000V AC/Minute

Material: Phosphor Bronze

Contact plating: Tin Over Ni

Ordering Information

WF3001-M T P XX 0X

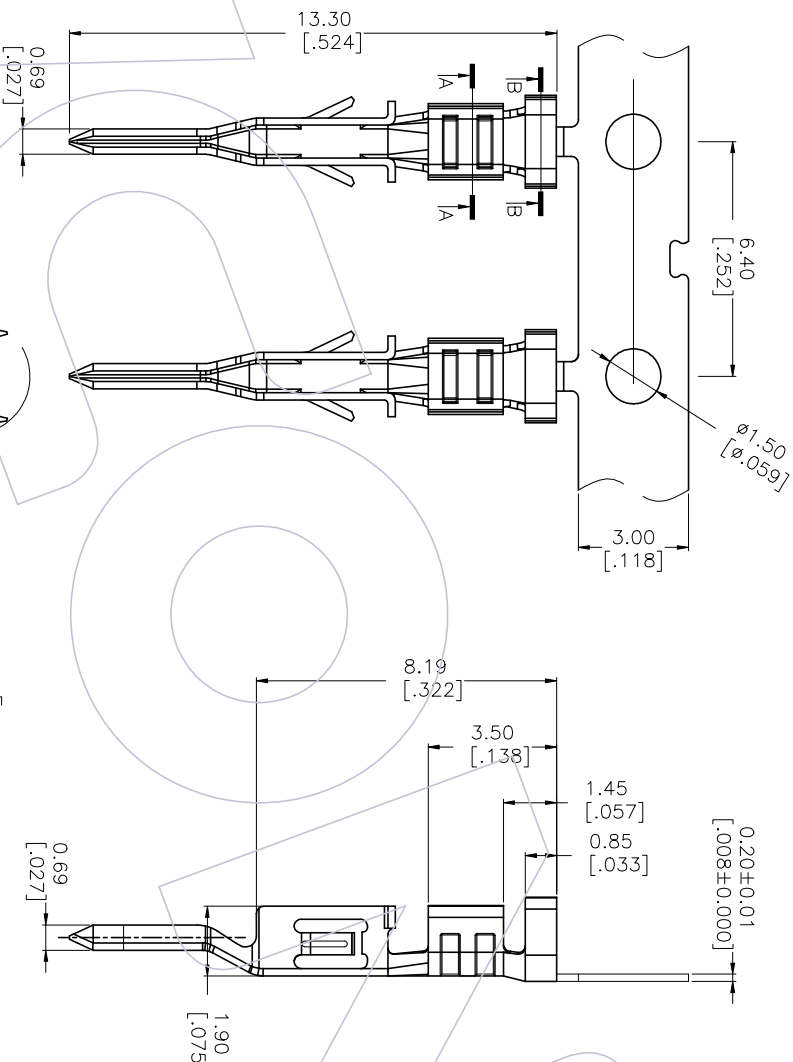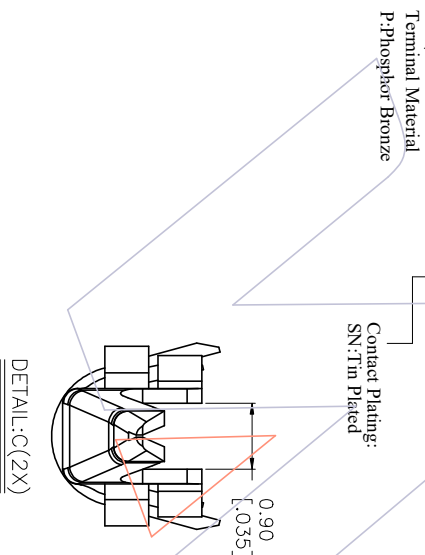

Part NO	Wire Range	A	B	C	D	E	F
WF3001-MTPx03	AWG18~20#	2.54[0.010]	2.54[0.100]	RO.76[0.030]	2.18[0.086]	2.39[0.094]	RO.74[0.029]
WF3001-MTPx02	AWG26~30#	1.91[0.075]	2.10[0.083]	RO.64[0.025]	1.47[0.058]	1.65[0.065]	RO.51[0.020]
WF3001-MTPx01	AWG20~24#	2.29[0.090]	2.54[0.100]	RO.76[0.030]	1.91[0.075]	2.08[0.082]	RO.64[0.025]

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A2	2023/10/13	Add AWG18-20#	GH	X.X ±0.40	GH	2023.06.17	1:1 mm	WF3001-MTPXX0X		Tel: +86 769 85358920	Tel: +86 512 57468408
A1	2023.06.17	Update the drawing	GH	X.XX ±0.25	CHECK	DATE	UNIT mm			Fax: +86 769 85358915	Fax: +86 512 57468468
A0	2012.06.22	NEW	LKP	X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		3.0 CRIMP MALE TERMINAL	E-mail: sales@wcon.com	E-mail: sales@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	TOL	PROJ.	Customer NO.				

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com