

HSF


NOTES:

Rated Current:5.0AMP

Contact Resistance: 20m Ω max

Withstand Voltage:1000V AC

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

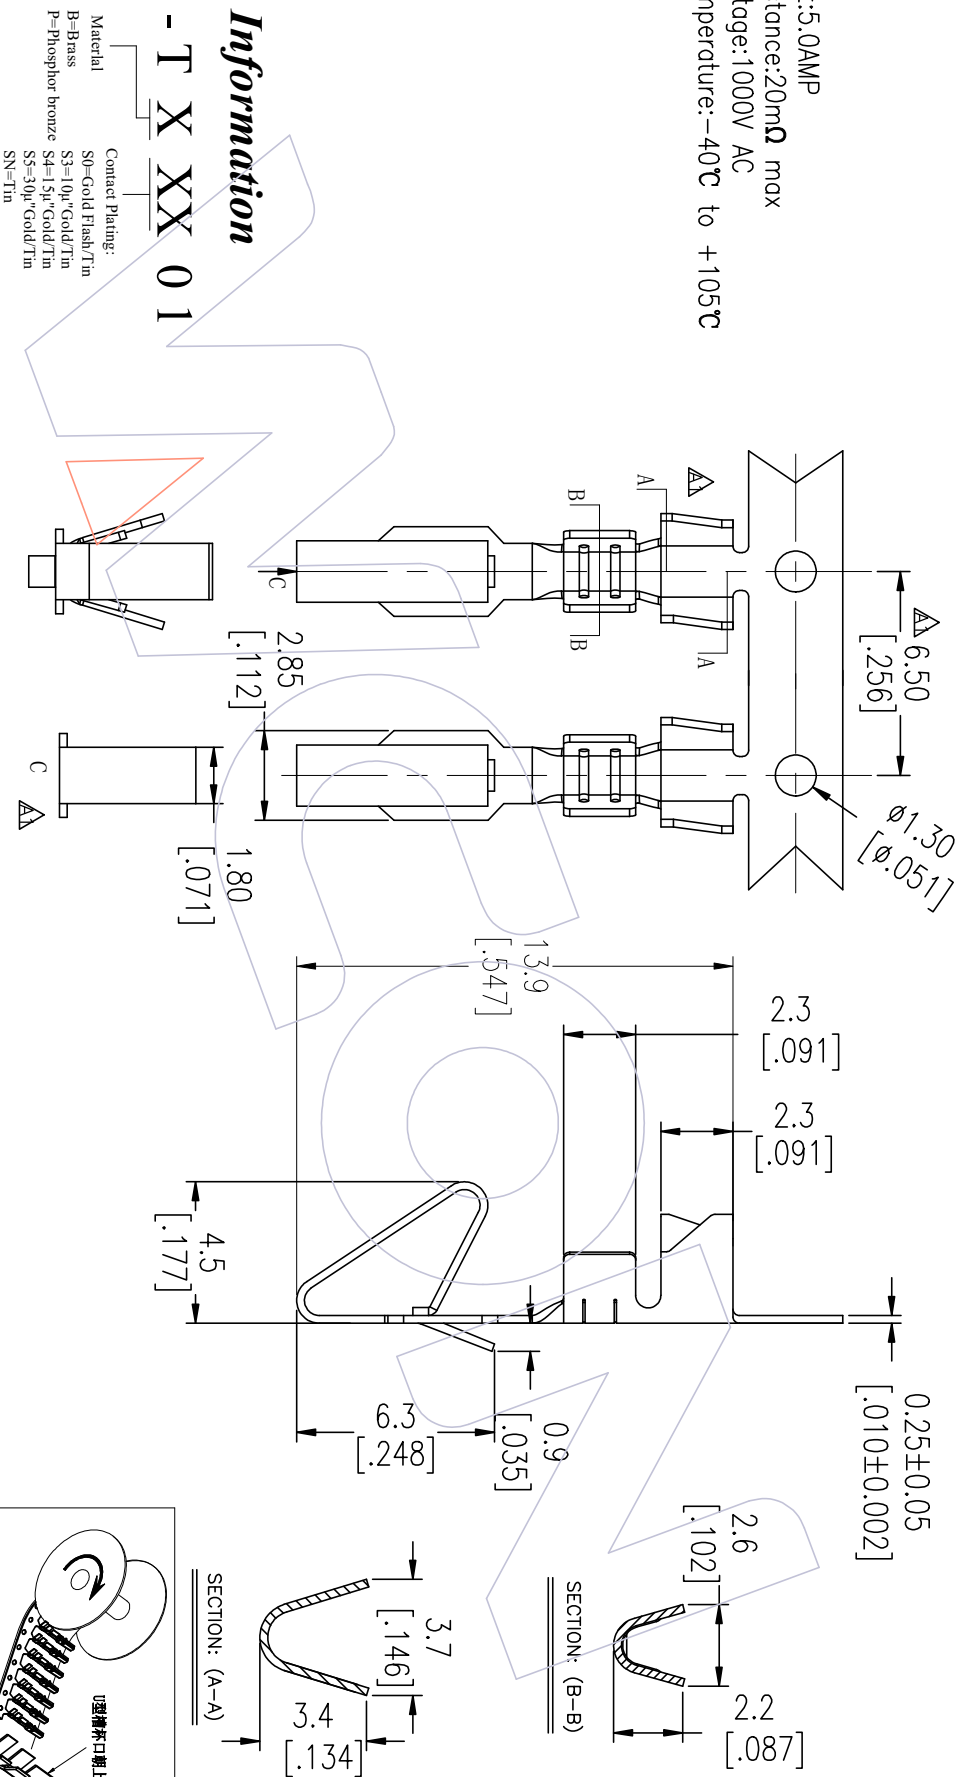


Ordering Information

WF3961 - T X XX 01

Material	Contact Plating
B=Brass	S0=Gold Flash/Tin
P=Phosphor bronze	S3=1.0μm Gold/Tin
	S4=1.5μm Gold/Tin
	S5=3.0μm Gold/Tin
	SN=Tim

Specification & Ordering Information:

Part No.	Thickness	Thickness	Wire Range	Insulation O.D
WF3961-TPXX01	0.25	Phosphor bronzes	AWG#18~#22	2.80mm(Max)
WF3961-TBXX01	0.25	Brass	AWG#18~#22	2.80mm(Max)

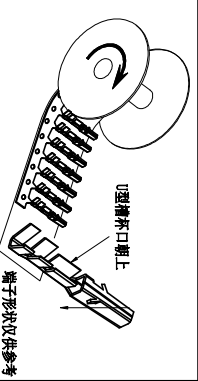[illegible]