

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

NOTES:

Current Rating:5.0AMP

Contact Resistance: $20\text{m}\Omega$ Max


Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass


Contact plating: Au Or Sn Over Ni

Insulator Material: PA66 Or PA46

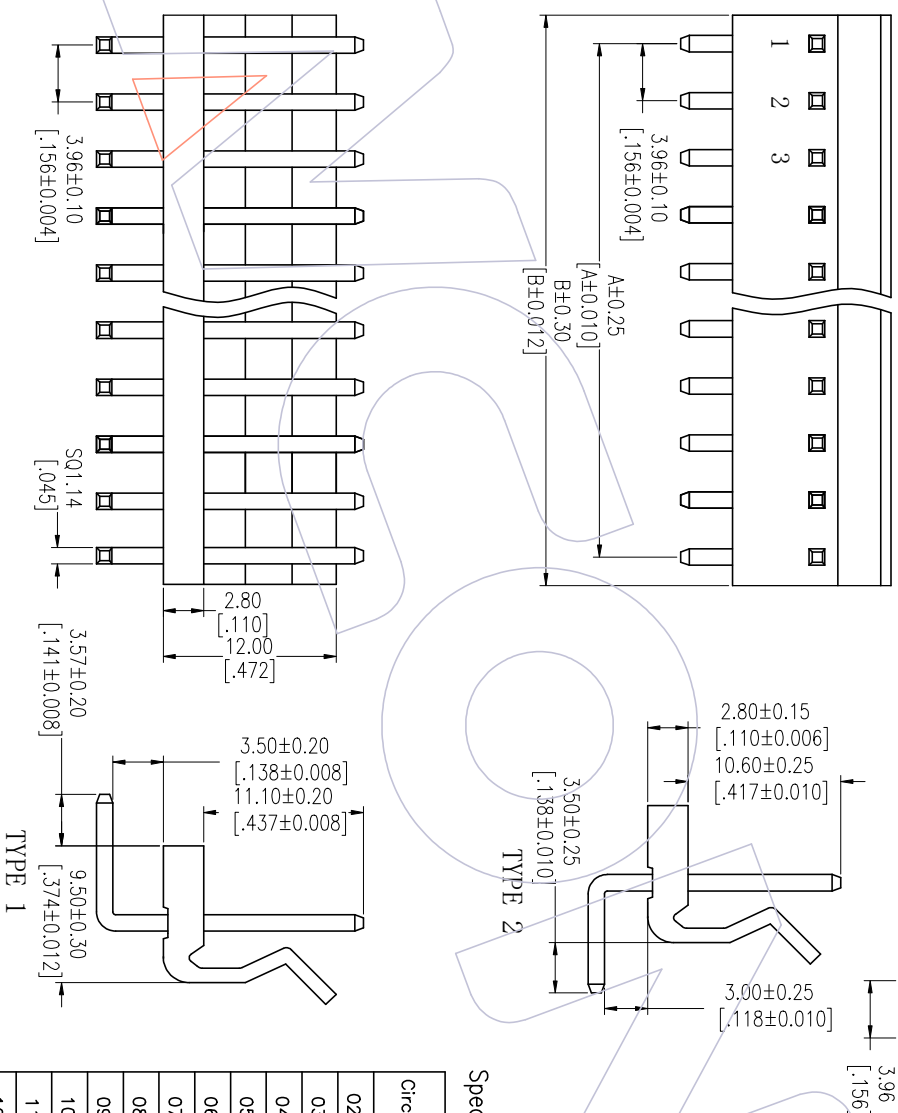

Ordering Information

WF3961-WRHX-X-W0-X

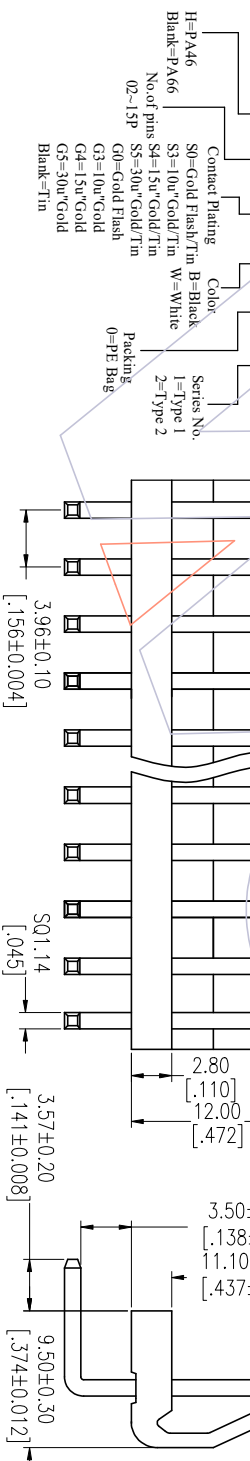

TYPE	PART NO.
TYPE 1	WF3961-WRXXW01
TYPE 2	WF3961-WRXXW02

Circuit	Port No.	Dimension		QTV/ bog
		A	B	
02	WF3961-WR02W0X	3.96	7.92	700
03	WF3961-WR03W0X	7.92	11.88	600
04	WF3961-WR04W0X	11.88	15.84	450
05	WF3961-WR05W0X	15.84	19.80	350
06	WF3961-WR06W0X	19.80	23.76	300
07	WF3961-WR07W0X	23.76	27.72	250
08	WF3961-WR08W0X	27.72	31.68	200
09	WF3961-WR09W0X	31.68	35.64	180
10	WF3961-WR10W0X	35.64	39.60	150
11	WF3961-WR11W0X	39.60	43.56	120
12	WF3961-WR12W0X	43.56	47.52	90
13	WF3961-WR13W0X	47.52	51.48	70
14	WF3961-WR14W0X	51.48	55.44	50
15	WF3961-WR15W0X	55.44	59.40	30

[illegible]