

HSE

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

NOTES:

Current Rating: 1AMP

Contact Resistance: 30m Ω max

Withstand Voltage: 250V AC/DC

Insulation Resistance: 1000M Ω min



Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Phosphor

Bronze(C5191-H)


Contact plating: Au Or Sn Over Ni

Insulator Material: PA9T+33%GF(UL94V-0) Δ_{AI}

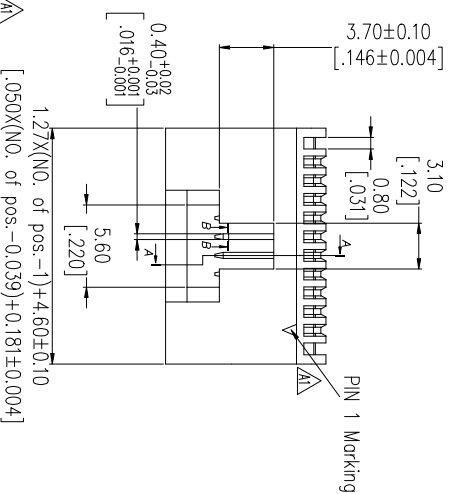


SECTION B-B

SCALE 10:1

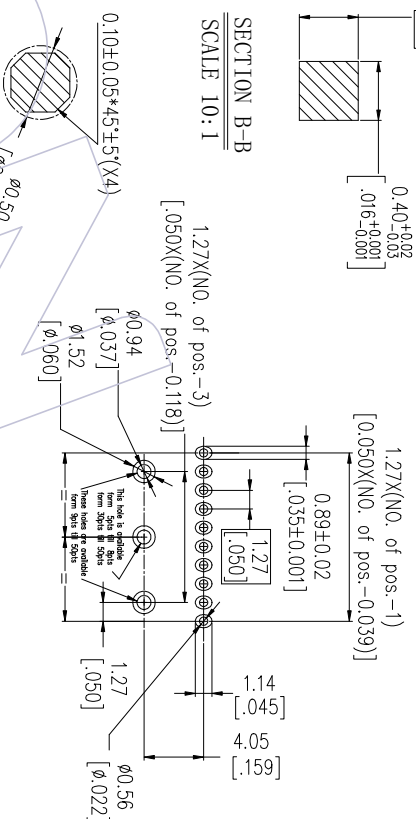

SECTION C-C

SCALE 10:1

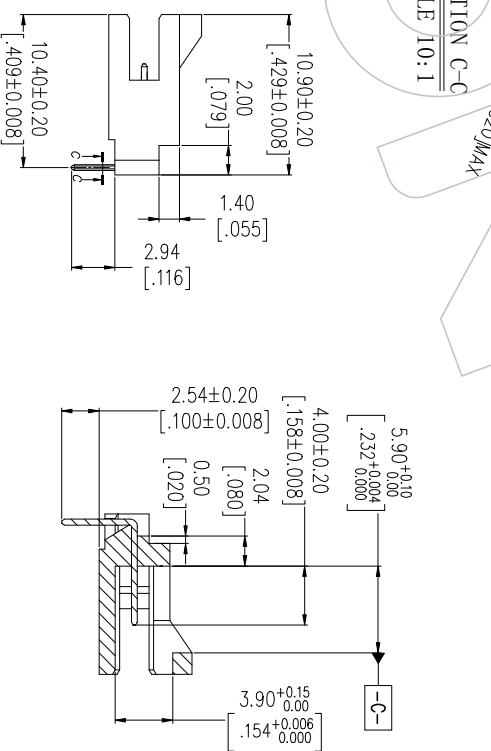


SECTION A-A

SCALE 1:1

Ordering Information

WF1271-1 WR H XX S0 B T 1

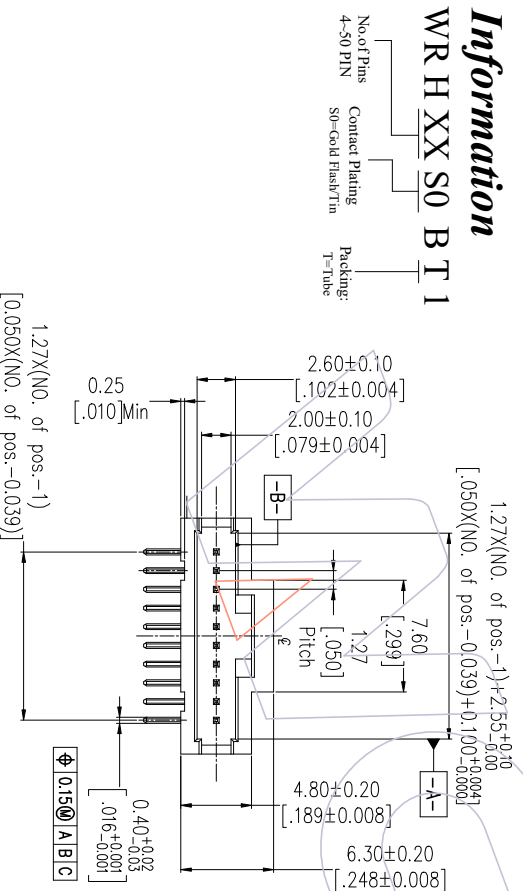[illegible]