


NOTES:
Rated Current: 3.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor bronze
Contact Plating: Au or Sn Over Ni

Ordering Information

WF2549 - T P XX 02

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

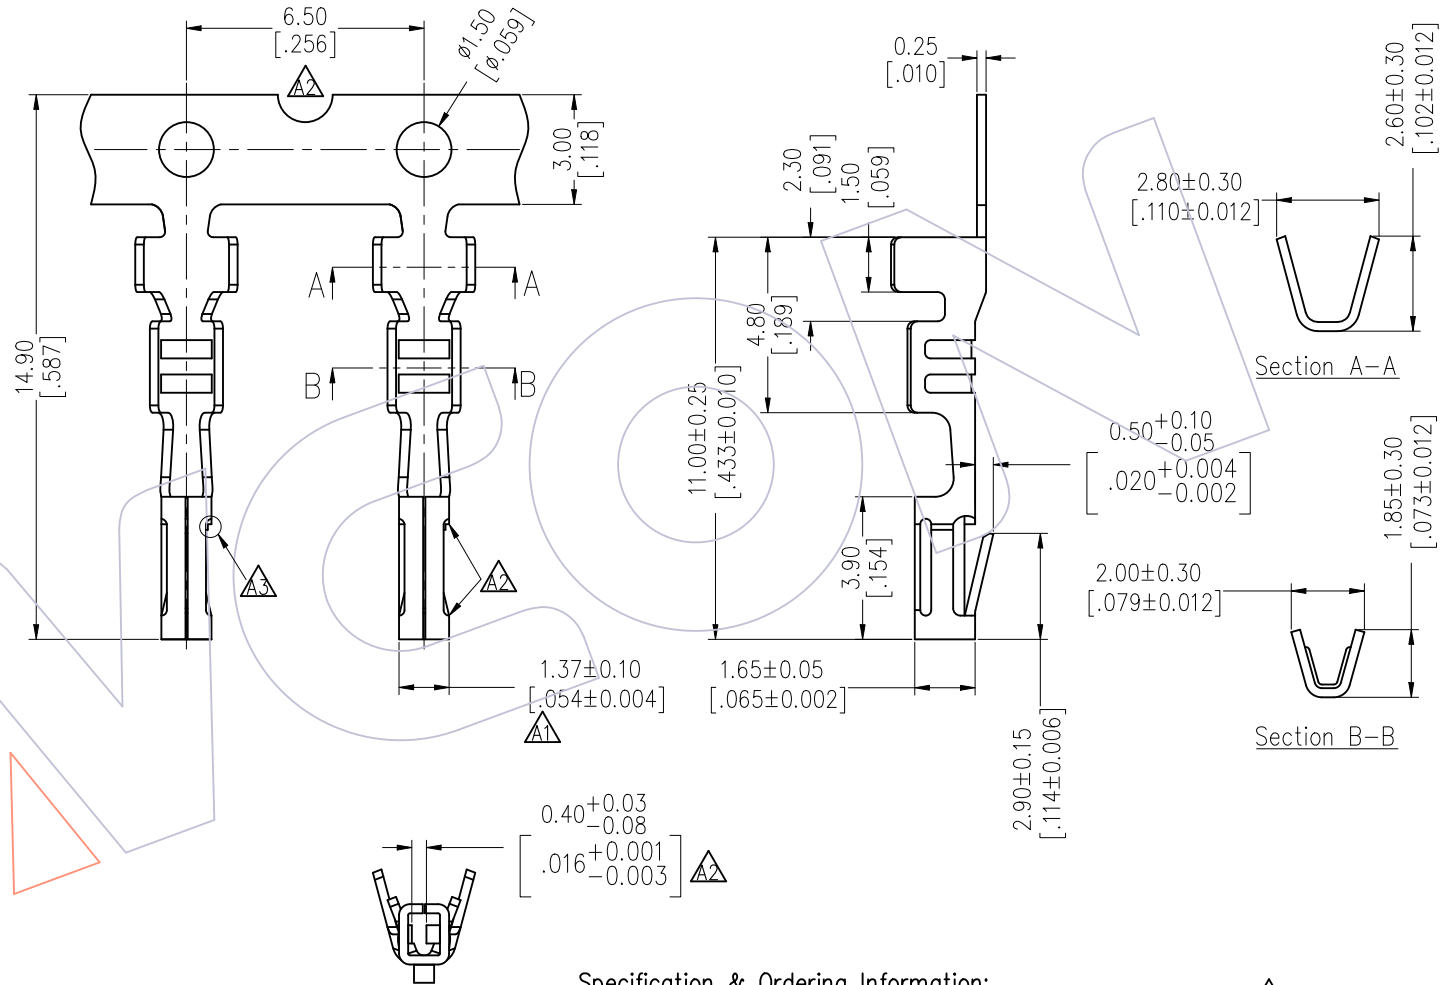

Specification & Ordering Information:

Part No.	Thickness	Finish	Material	Wire Range	Insulation O.D
WF2549-TPS002	0.25	Gold/Tin	Phosphor bronze	AWG#22~#24	1.55mm(Max)
WF2549-TPSN02	0.25	Tin-Plated	Phosphor bronze	AWG#22~#24	1.55mm(Max)

A4	2025/06/10	Modify the drawing	NYF	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com 2. 54mm TERMINAL Customer NO.
A3	2024/05/09	Modify the drawing	—	X.X ±0.40	YZJ	2024/05/09	UNIT	mm inch	WF2549-TPXX02	
A2	2019/04/01	Modify the drawing	—	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
AO	2012/09/08	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	2. 54mm TERMINAL	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL		DATE	PROJ.		Customer NO.	