

HSF

NOTES:

Current Rating:3.0A
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn Over Ni
Insulator Material:PA66 or PA46 (UL94V-0)

Ordering Information

WF2541-WR XX X 0 X

No. of pins
02-20P


Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

Color
B=Black
E=Beige
T=Natural




Series No.
1=Type 1
2=Type 2

Packing
0=PE Bag(STD)
R=Reel


H=PA46
Blank=PA66

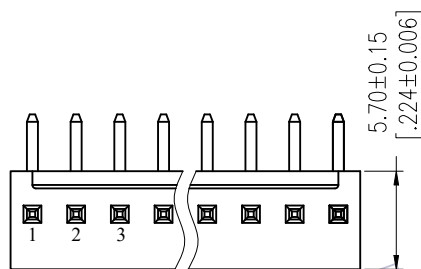

07-20PIN

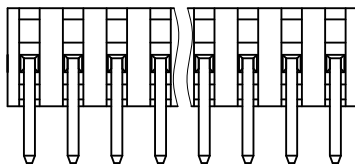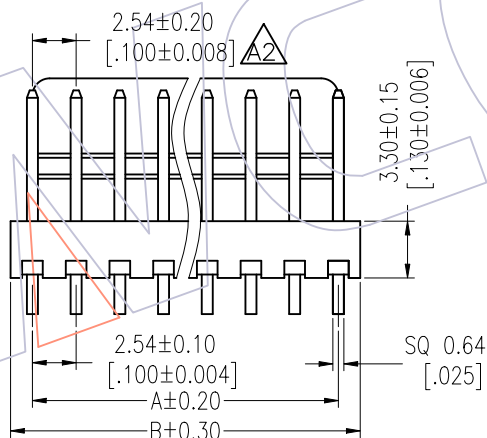


TYPE 1

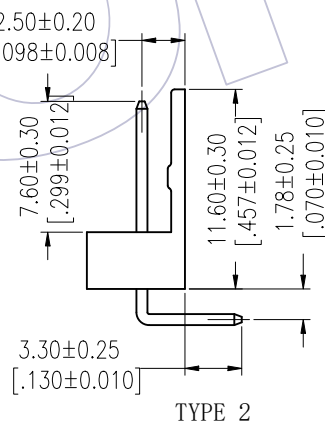

TYPE 2

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'TY/ bag
		A	B	
02	WF2541-WR(X)02XXX0X	2.54	5.08	1,000
03	WF2541-WR(X)03XXX0X	5.08	7.62	1,000
04	WF2541-WR(X)04XXX0X	7.62	10.16	1,000
05	WF2541-WR(X)05XXX0X	10.16	12.70	1000
06	WF2541-WR(X)06XXX0X	12.70	15.24	500
07	WF2541-WR(X)07XXX0X	15.24	17.78	500
08	WF2541-WR(X)08XXX0X	17.78	20.32	500
09	WF2541-WR(X)09XXX0X	20.32	22.86	500
10	WF2541-WR(X)10XXX0X	22.86	25.40	500
11	WF2541-WR(X)11XXX0X	25.40	27.94	300
12	WF2541-WR(X)12XXX0X	27.94	30.48	300
13	WF2541-WR(X)13XXX0X	30.48	33.02	300
14	WF2541-WR(X)14XXX0X	33.02	35.56	300
15	WF2541-WR(X)15XXX0X	35.56	38.10	200
16	WF2541-WR(X)16XXX0X	38.10	40.64	200
17	WF2541-WR(X)17XXX0X	40.64	43.18	200
18	WF2541-WR(X)18XXX0X	43.18	45.72	200
19	WF2541-WR(X)19XXX0X	45.72	48.26	200
20	WF2541-WR(X)20XXX0X	48.26	50.80	200

TYPE	PART NO.
TYPE 1	WF2541-WR(X)XXXXX01
TYPE 2	WF2541-WR(X)XXXXX02

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A2	2020/05/05	Add Dimension	Du Ying	X.X ±0.40	UNIT	mm	SEE TAB		
A1	2017/04/25	MODIFY	Ding	X.XX ±0.25	SIZE	A4		"M"TYPE 2.54 Wafer 90°	
AO	2012/09/08	NEW		X.XXX ±0.15	SHEET	1/1			
				Angle ± 3°	PROJ.				
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
WCON-Kunshan Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com