

HSF

NOTES:

Current Rating:1.0A AC/DC
Contact Resistance:20milliohm Max
Insulation Resistance:100Megohm Min
Withstand Voltage500V AC/minute
Operation Temperature:-25℃ to +105℃

Housing Material:PA9T+30%GF(UL94V-0)
Contact Material:Brass
Contact plating:Sn over Ni
02-06Pin without slot"A"


Ordering Information

WF1001A-WZ XX E R1

No.of Pins:
2P~20P



Insulator Color:
E= Beige

Packing:
R=Tape & Reel

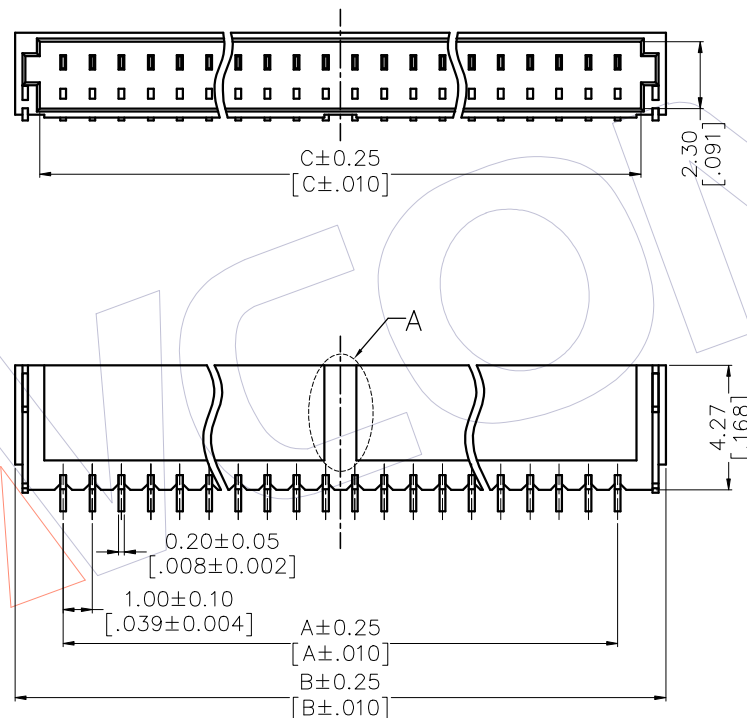

1.20±0.10
[.047±0.004]

RECOMMENDED PCB LAYOUT TOLERANCE IS ±0.05

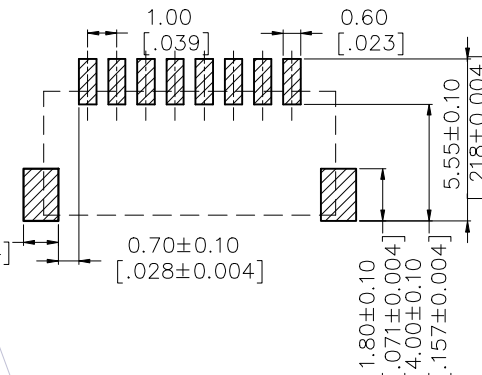

Ordering Information & Dimensions:

Part No.	Dimension		
	A	B	C
WF1001A-WZ02ER1	1.00	4.30	2.60
WF1001A-WZ03ER1	2.00	5.30	3.60
WF1001A-WZ04ER1	3.00	6.30	4.60
WF1001A-WZ05ER1	4.00	7.30	5.60
WF1001A-WZ06ER1	5.00	8.30	6.60
WF1001A-WZ07ER1	6.00	9.30	7.60
WF1001A-WZ08ER1	7.00	10.30	8.60
WF1001A-WZ09ER1	8.00	11.30	9.60
WF1001A-WZ10ER1	9.00	12.30	10.60
WF1001A-WZ11ER1	10.00	13.30	11.60
WF1001A-WZ12ER1	11.00	14.30	12.60
WF1001A-WZ13ER1	12.00	15.30	13.60
WF1001A-WZ14ER1	13.00	16.30	14.60
WF1001A-WZ15ER1	14.00	17.30	15.60
WF1001A-WZ16ER1	15.00	18.30	16.60
WF1001A-WZ17ER1	16.00	19.30	17.60
WF1001A-WZ18ER1	17.00	20.30	18.60
WF1001A-WZ19ER1	18.00	21.30	19.60
WF1001A-WZ20ER1	19.00	22.30	20.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW KH	DATE 2013.12.23	SCALE 1:1	PART NO. WF1001A-WZXXER1	TITLE: J SH 1.0mm Wafer 90度SMT	Customer NO.	WCON
				X.X	±0.40							
				X.XX	±0.25	CHECK	DATE	UNIT mm				
				X.XXX	±0.15			SIZE A4				
				Angle	± 3°	APPROVE	DATE	SHEET 1/1				
				DIM	TOL			PROJ.				
A0	2013.12.23	NEW	-									
REV	DATE	MODIFICATION DESCRIPTION	CHANGE									

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon-china.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: wconks@wcon-china.com