

HSF

NOTES:

Rated Current:1.0AMP

Rated Voltage:50V AC/DC



Contact Resistance:20mΩ max

Withstand Voltage:500V AC/Minute

Insulation Resistance:500MΩ min

Operation Temperature: -40℃ to +105℃

Insulator Material: PA66 UL94V-0

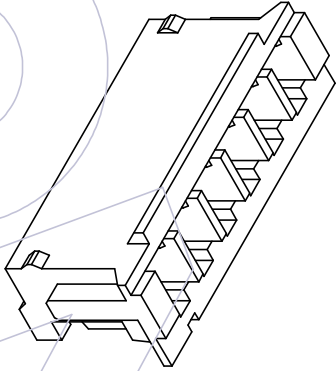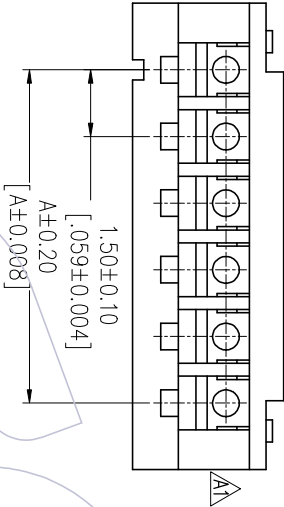


Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'ty /Bag
		A	B	C	
02	WF1501-H02X01	1.50	4.50	3.30	1,000
03	WF1501-H03X01	3.00	6.00	4.80	1,000
04	WF1501-H04X01	4.50	7.50	6.30	1,000
05	WF1501-H05X01	6.00	9.00	7.80	1,000
06	WF1501-H06X01	7.50	10.50	9.30	1,000
07	WF1501-H07X01	9.00	12.00	10.80	1,000
08	WF1501-H08X01	10.50	13.50	12.30	1,000
09	WF1501-H09X01	12.00	15.00	13.80	1,000
10	WF1501-H10X01	13.50	16.50	15.30	1,000
11	WF1501-H11X01	15.00	18.00	16.80	1,000
12	WF1501-H12X01	16.50	19.50	18.30	1,000
13	WF1501-H13X01	18.00	21.00	19.80	1,000
14	WF1501-H14X01	19.50	22.50	21.30	1,000
15	WF1501-H15X01	21.00	24.00	22.80	1,000
16	WF1501-H16X01	22.50	25.50	24.30	1,000
17	WF1501-H17X01	24.00	27.00	25.80	1,000
18	WF1501-H18X01	25.50	28.50	27.30	1,000
19	WF1501-H19X01	27.00	30.00	28.80	1,000
20	WF1501-H20X01	28.50	31.50	30.30	1,000

Ordering Information

WF 1501 - H XX X 0 1

No. of pins
02pin-20pin
Color
E=Beige
W=White

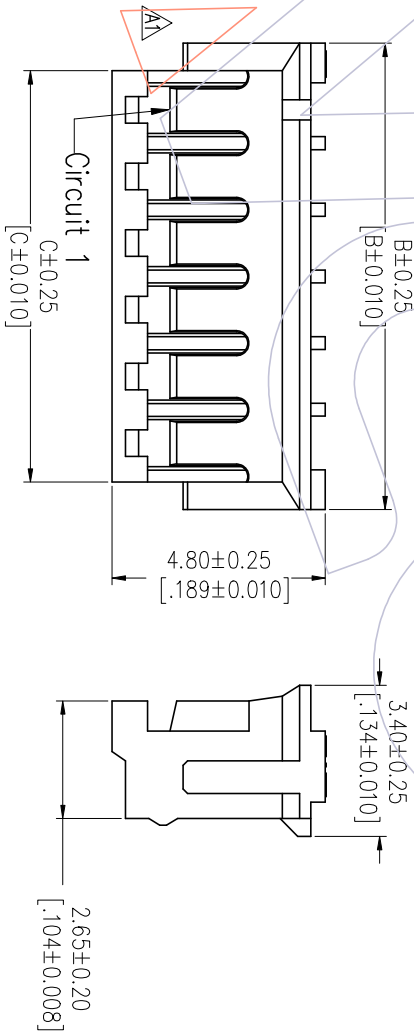

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		FIT	PART NO.	TITLE:	Customer NO.
				XX	±0.40			UNIT	mm				
A1	2014/03/25	MODIFY THE VIEW	—	X.XX	±0.25	CHECK	DATE	SIZE	A4	1/1	ZH 1.50 WAFER HOUSING		
AO	2012/09/03	NEW	—	X.XXX	±0.15	Angle	DATE	SHEET	1/1				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	PROJ.					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com