
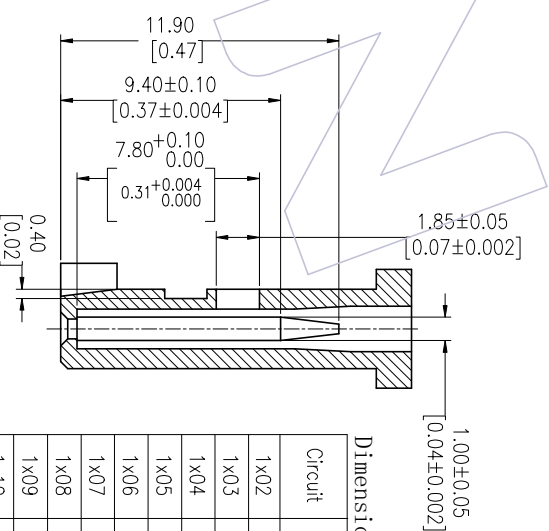

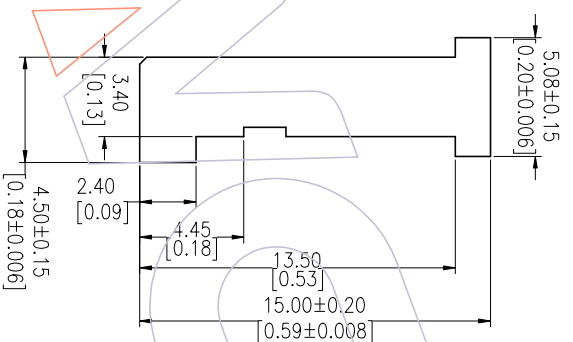


HSHF

NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃
Insulator Material:PBTT+30%GF UL94V-0

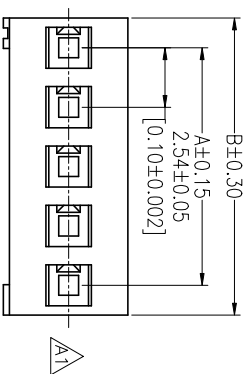

Section A-A

Dimensional & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
1x02	WF2547-1H02X01	2.54	5.08
1x03	WF2547-1H03X01	5.08	7.62
1x04	WF2547-1H04X01	7.62	10.16
1x05	WF2547-1H05X01	10.16	12.70
1x06	WF2547-1H06X01	12.70	15.24
1x07	WF2547-1H07X01	15.24	17.78
1x08	WF2547-1H08X01	17.78	20.32
1x09	WF2547-1H09X01	20.32	22.86
1x10	WF2547-1H10X01	22.86	25.40
1x11	WF2547-1H11X01	25.40	27.94
1x12	WF2547-1H12X01	27.94	30.48
1x13	WF2547-1H13X01	30.48	33.02
1x14	WF2547-1H14X01	33.02	35.56
1x15	WF2547-1H15X01	35.56	38.10
1x16	WF2547-1H16X01	38.10	40.64
1x17	WF2547-1H17X01	40.64	43.18
1x18	WF2547-1H18X01	43.18	45.72
1x19	WF2547-1H19X01	45.72	48.26
1x20	WF2547-1H20X01	48.26	50.80

Ordering Information

WF2547 - 1 H XX X 0 1

No.of pins 02P~20P
Color E=Beige
W=White
B=Black
U=Blue
Packing 0=PE Bag

			OPERATION		DRAW		DATE	SCALE		FIT	PART NO.	
A2	2021/08/31	Add Part No.		Du Ying	X.X	±0.40	Du Ying	2021/08/31	UNIT	mm	SEE TABLE	
A1	2012/02/23	Modify drawing	BEN		X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:	
AO	2009/07/23	NEW	—		X.XXX	±0.15					"J" 2.54mm Housing Single Row	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle	± 3°	APPROVE	DATE	SHEET	1/1	Customer NO.	
					DIM	TOL			PROJ.			



Http: www.wcon.com

WCON-Dongguan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408

Fax: +86 512 57468468

E-mail: sales@wcon.com